

INSTANT, SELF ADHESIVE, SLIP RESISTANT SAFETY SURFACE

For Light Duty & Temporary Commercial Application

CHECK THESE ADVANTAGES!

Slip resistant from any direction, wet or dry


Adapts easily to production setups

Economical cost

Quick to install



Standard Flex-Tred colour is black

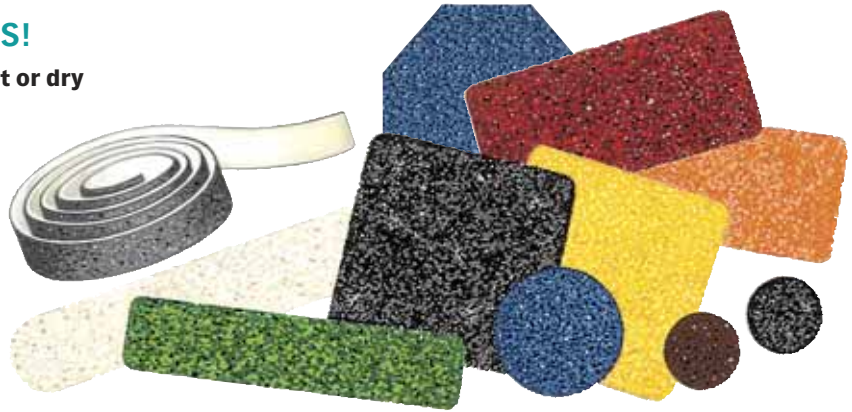

Easy Application

Flex-Tred is easy and quick to apply. Prepare surface, peel the backing off and stick down. It's that simple. No messy glues or separate adhesives to work with. Flex-Tred should be applied anywhere safety is required to reduce the possibility of an accident by slipping or falling.

Technical Data

Flex-Tred is formulated of the highest quality raw materials available. Several individual layers are permanently bonded together to produce a single long lasting heavy duty slip resistant surface. The top layer of near-diamond-hard abrasive grit is secured for long life by a flexible polymeric binder, bonded to durable flexible plastic substrate. The pressure sensitive adhesive with high bonding features is protected by a poly-coated Kraft release paper.

Unique Flex-Tred construction utilising flexible polymeric materials and high quality abrasives provides outstanding slip resistance, appearance, flexibility and durability. Flex-Tred adhesive reaches maximum strength after 4 days at 21°C.

Tests

Flex-Tred has been extensively tested in the USA and proven durable under a variety of adverse conditions. Flex-Tred meets or exceeds USA-ASTM-PSATC and MILITARY SPECIFICATIONS covering pressure sensitive adhesive, slip resistant coatings. Government spec MIL-D-17951C (ships), MVSS 302 (Passenger vehicles), Government spec MIL-W-5044C (aircraft).

Environmental Resistance

Flex-Tred is a slip resistant material that produces a durable surface, defiant to most weather conditions. With careful attention to bonding Flex-Tred will endure temperature extremes of -5°C to 100°C. Special colour formulation enables Flex-Tred to resist fading and discolouration even after exposure to the sun for long periods of time.

Custom Die-cutting

Special shapes and sizes can be die-cut for a variety of applications. The unique capability of custom die-cutting to the exact requirements of the customer is an exclusive feature of Flex-Tred.

INSTALLATION ACCESSORIES

Latham Gold-Chem Chemical Floor Cleaner

1Kg, 5Kg, 35Kg Packs. A neutral Ph biodegradable chemical cleaner for preparing surface to take Flex-Tred.

Also excellent for regular pavement maintenance – cleaning terrazzo, marble, slate, epoxy, concrete, vinyl etc.

Flex-Tred HD Mixture

Add 150 grams (1 cup) Gold-Chem to 4 litres cold water. Apply liberally and scrub, keeping surface flooded for a minimum of five minutes, then remove (Flex-Tred must only be applied to a dry clean surface).

Asbra Adhesive Plus

Standard pack 500ml. For porous surfaces – seals and primes – concrete, wood, etc. – prior to installation. Coverage: 500ml pack approximately 1.5 square metres.

Asbra Edge Sealer

Flex-Tred is water resistant under normal surface conditions with the application of Asbra Edge Sealer. Standard pack 100ml. Coverage: approximately 25 lineal metres of sealed edge.

Asbra Roller

For rolling down Flex-Tred.

FLEX-TRED SIZES

Standard Rolls

25mm wide x 18m long, 50mm wide x 18m long
150mm wide x 18m long, 300mm wide x 18m long

Tile Squares

140mm x 140mm and 90mm x 190mm.

Cleats (radius ended)

Maximum length two metres.

Facilities available to cut 25mm x 18m long rolls.

FLEX-TRED™ COLOUR GUIDE

*Lumo-Luminescent glow-in-the-dark infill

Standard Flex-Tred colour is black. Flex-Tred is available in a wide range of colours to accent and harmonise in most applications. Flex-Tred is the leader in introducing colour to the stick-down slip resistant surface market. Batch colours may vary and amber.



grey

blue

green

red

brown

white

clear

safety yellow

orange

lumo*