




Latham Architectural Landscape Grates, Grids and Frames

Lathamgrate™ aluminium and brass trench gratings and frames are an economical, functional and attractive solution to exterior and interior drainage and ventilation problems.

The serrated texture provides a dynamic and contemporary appearance to compliment today's architectural designs. Unlike conventional gratings, Lathamgrate's have close centre bars, concealed welds and can be fabricated to form a radius. Lathamgrate's are available for trenches up to 300mm wide. Latham aluminium and brass trench gratings and frames offer many benefits over similar products, fabricated from steel or cast iron. Aluminium and brass gratings are lightweight and attractive. Optional trench liners simplify installation and offer improved performance. Trench gratings are for exterior and interior use, including building entrances and wash-down areas. The grating bars are 6.25mm wide which combined with the serrated surface helps provide pedestrian safety. The closely spaced bearing bars reduce hazards in high heels. Lathamgrate's are designed for pedestrian traffic. For heavier applications and for block-ends, angles and radii grates contact Latham Australia before specifying.


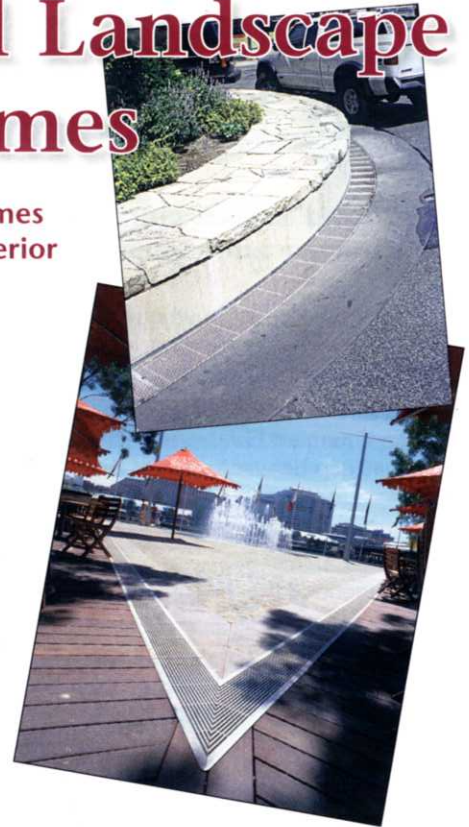


ALGRS SERIES SERRATED TOP SURFACE MOUNTED ALUMINIUM TRENCH GRATINGS are self supporting for existing applications. The tapered ramped edges help to provide an almost seamless joint with the flat floor surface and also allow easy installation.

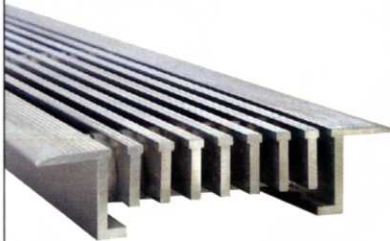



SERRATED	A	B
ALGRS-3S	75mm	100mm
ALGRS-4S	100mm	150mm
ALGRS-6S	150mm	200mm
ALGRS-8S	200mm	250mm
ALGRS-10S	255mm	305mm
ALGRS-12S	305mm	355mm

ALGLS SERIES SERRATED TOP SURFACE MOUNTED ALUMINIUM TRENCH GRATINGS have their own frame system, which are for cast-in or rebate installations. The optional galvanised trench liner can be manufactured to any depth and up to 300mm wide. The ALGLS Series of Serrated Trench Covers can be fitted with optional vandal resistant locking mechanisms, helping to prevent unauthorized removal of gratings.

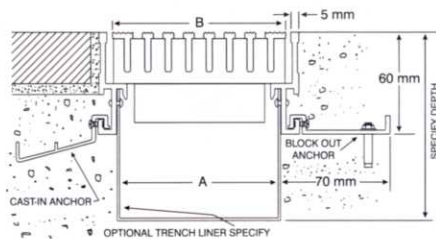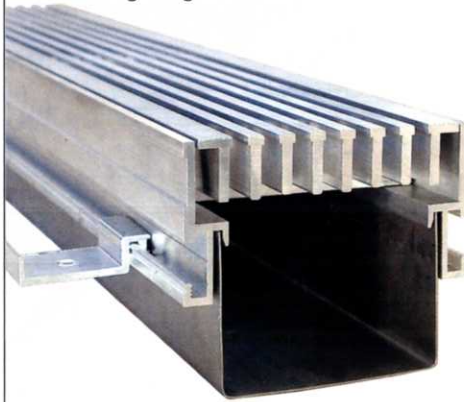

SERRATED	A	B
ALGLS-4S	100mm	110mm
ALGLS-6S	140mm	150mm
ALGLS-8S	190mm	200mm
ALGLS-10S	245mm	255mm
ALGLS-12S	295mm	305mm

ALGPL SERIES SERRATED TOP ALUMINIUM TRENCH GRATINGS are specially designed to sit on rods, bars or pipes, which should be installed 60mm below the finished surface level and at a maximum of 200mm centres. This allows the trench to have fall. As an optional alternative the side supports can be extended through to the bottom of the trench and trimmed on site to fall, eliminating the need for rod bar and pipe supports.

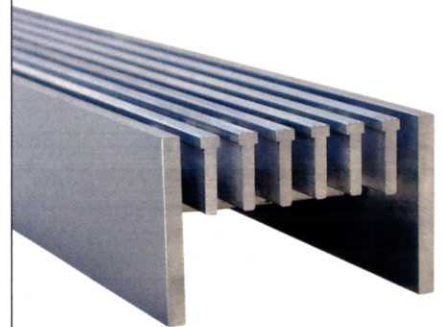

SERRATED	A	B
ALGPL-4S		100mm
ALGPL-6S		150mm
ALGPL-8S		205mm
ALGPL-10S		255mm
ALGPL-12S		305mm

For more detailed information & specifications on Grates, Grids & Frames see Latham Flooring Systems Manual 5

LATHAM AUSTRALIA PTY LTD
 FAX: 61 2 9879 7666 PHONE: 61 2 9879 7888
 EMAIL: INFO@LATHAM-AUSTRALIA.COM