







LATHAM AUSTRALIA PTY LTD
 FAX: 61 2 9879 7666 PHONE: 61 2 9879 7888
 EMAIL: INFO@LATHAM-AUSTRALIA.COM



BRGRS SERIES SERRATED TOP SURFACE MOUNTED SOLID BRASS TRENCH GRATINGS are self supporting for existing applications. The tapered ramped edges help to provide an almost seamless joint with the flat floor surface and also allow easy installation.

BRGPL SERIES SERRATED TOP SOLID BRASS TRENCH GRATINGS are specially designed to sit on rods, bars or pipes, which should be installed 50mm below the finished surface level and at a maximum of 200mm centres, this allows the trench to have fall. As an optional alternative the side supports can be extended through to the bottom of the trench, trimmed on site to fall, eliminating the need for rod bar and pipe supports.

BRGNS SERIES SERRATED TOP SOLID BRASS TRENCH GRATINGS can be inserted with or without a 3mm brass angle frame, on a formed recess or step in the trench. The BRGNS Series grate is 33mm deep. The overall depth with optional brass angle is 36mm.

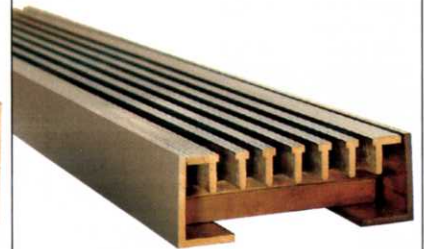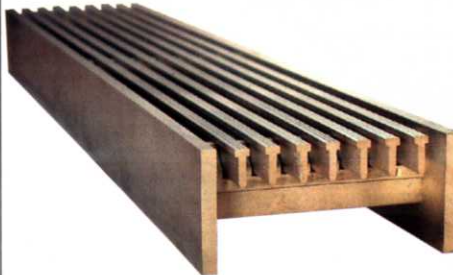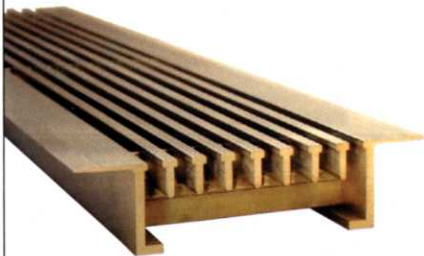

SERRATED	A	B
BRGRS-3S	75mm	100mm
BRGRS-4S	100mm	150mm
BRGRS-6S	150mm	200mm
BRGRS-8S	200mm	250mm
BRGRS-10S	255mm	305mm
BRGRS-12S	305mm	355mm

SERRATED	A	B
BRGPL-4S		100mm
BRGPL-6S		150mm
BRGPL-8S		205mm
BRGPL-10S		255mm
BRGPL-12S		305mm

SERRATED	A	B
BRGNS-4S	50mm	110mm
BRGNS-6S	100mm	150mm
BRGNS-8S	155mm	200mm
BRGNS-10S	205mm	255mm
BRGNS-12S	255mm	305mm

For more detailed information & specifications on Grates, Grids & Frames see Latham Flooring Systems Manual 5