



## Stress Relieving Flush Sided Control Strips ■ Brass, Zinc


## Flush Sided




FFSLS 22 x 6 brass/grey

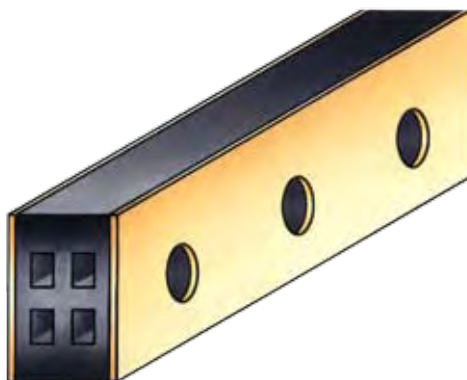


FFSLS 22 x 12 brass/black

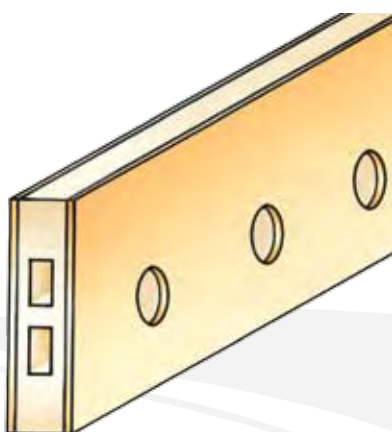


FFSLS 31 x 6 brass/buff

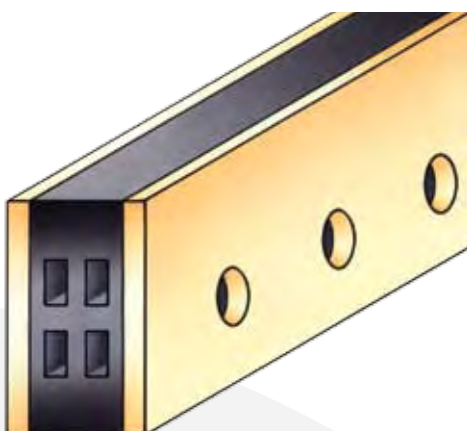

FFSLS3MM 31 x 12 brass/black

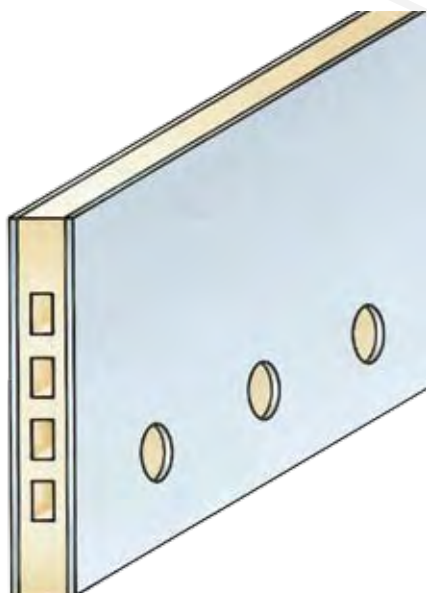

FFSLS 50 x 6 stainless steel/buff

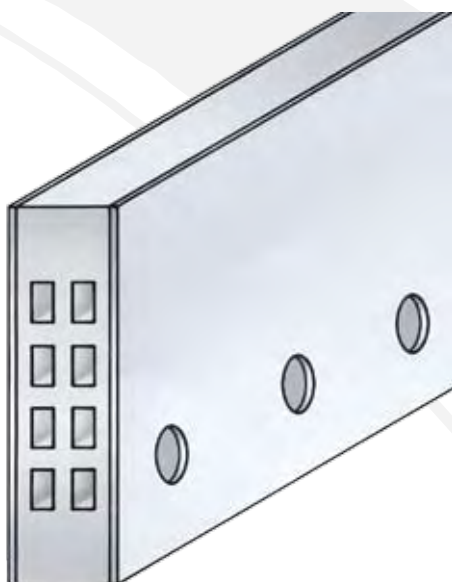

FFSLS 50 x 12 zinc/grey

Latham Neoprene Stress Relieving Control Strips are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked when the floor finish is installed. These control strips are designed to be saw cut into the finished floor to help control expansion in the flooring surface, by relieving stress that can build up when flooring is installed without the use of control joints. Over stressed floor finishes may crack or lift.

Latham Neoprene Stress Relieving Control Strips are supplied in standard lengths of 1800mm and installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see Page 26).

Latham Neoprene Stress Relieving Strips should be installed at all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across doorways, garden beds, manhole covers and embedded pipe work and anywhere that may impede expansion and contraction of the tiling.

### Stress Relieving Control Strips

To order specify height, neoprene colour & metal type

Product Type	Application	Metal Members	Metal Side Plate Depth
FFSLS... x 6	Stress Relieving Flush Sided Control Strip – Adhesive fixed sawcut through to structural slab	Brass & zinc: 1mm or optional 3mm S/Steel: 0.7mm	22mm
FFSLS ... x 12			31mm
			40mm
			50mm

Standard neoprene colour black. Grey & buff colours available on request.

Latham Neoprene Stress Relieving Control Strips are supplied with the following metal sideplate thicknesses: standard brass & zinc products 1mm thick.

**Optional 3mm thick brass & zinc sideplates** are also available, specify with 3mm sideplates when ordering: **FFSLS3mm**

LATHAM AUSTRALIA PTY LTD  
FAX: 61 2 9879 7666 PHONE: 61 2 9879 7888  
EMAIL: JOINTS@LATHAM-AUSTRALIA.COM