


For Terrazzo, Pebblecrete & Tile ■ Brass, Zinc, Rebonite

Dividing Strips

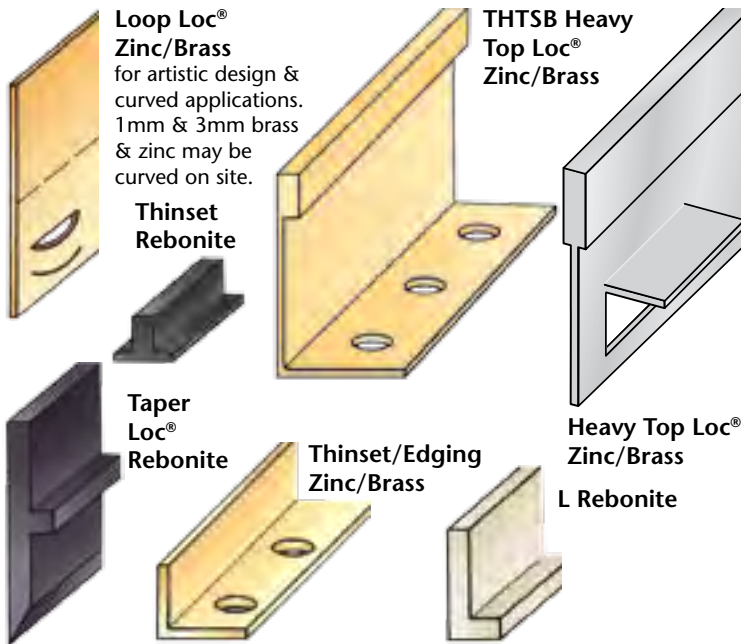

Dividing Strips in rebonite, brass and zinc are manufactured in standard 1800mm lengths. The thickness of the standard range of products has been carefully engineered to maintain even wear with that of the surface of the pavement. The bottom of the Loc® Strip forms a knife edge and is designed to create a weakness point in the underbedding under the division strip and to accommodate shrinkage.

For many years rebonite strips have proven their value as dividing strips in terrazzo and exposed aggregate paving. The proven success of this material in government institutions, large hospitals, city office buildings, department stores and shopping complexes speaks for itself.

Rebonite Dividing Strips

Latham Rebonite Dividing Strips are designed and prepared ready for laying and are available in L-Section and in special Deep Taper Loc® Section which is recommended for all applications where there is a sand/cement underbed; the taper forms a weakness in the bed under the strip.

The wearing quality of rebonite is comparable with that of the average terrazzo paving and with the application of heat, rebonite dividing strips may be bent to any required form. They are non-static and can be used in resinous type, thin terrazzo industrial paving.

Zinc and Brass Dividing Strips

Latham Dividing Strips in zinc and brass are manufactured from specially rolled 1mm hard zinc and brass sheet cut to width. Rolled flat for rigidity and punched with bedding lugs and flow holes for positive anchorage.

Latham Dividing Strips Terrazzo, Pebblecrete & Tile

For Cement Bedded Product

Material	Size	Type
Rebonite Colours black and buff available. Special colours minimum 1000 metres.	12mm(H) x 3mm x 6mm x 3mm	L
	16mm(H) x 3mm x 6mm x 3mm	L
	31mm(H) x 3mm	L Taper
	50mm(H) x 3mm x 20mm x 3mm	L
	60mm(H) x 3mm x 20mm x 3mm	L
Brass	22mm(H) x 1mm or 3mm	Loop Loc®
	31mm(H) x 1mm	Loop Loc®
	50mm(H) x 1mm or 3mm	Loop Loc®
Zinc	22mm(H) x 1mm or 2.5mm	Loop Loc®
	31mm(H) x 1mm or 2.5mm	Loop Loc®
	31mm(H) x 1mm x 3mm	Heavy Top Loc®
	50mm(H) x 1mm or 2.5mm	Loop Loc®
		Loop Loc®

For Adhesive Fixed Tiles & Industrial Resinous Paving

Material	Size	Type
Rebonite Colour black	3mm(H) x 3mm x 9mm x 1.5mm	T. Thinsset Resinous Floors
Brass Not recommended for use in resinous epoxy and polyester floors.	6mm(H) x 12mm x 1.5mm	L Perforated
	10mm(H) x 12mm x 1.5mm	L Perforated
	12mm(H) x 12mm x 1.5mm	L Perforated
	15mm(H) x 12mm x 1.5mm	L Perforated
	18mm(H) x 12mm x 1.5mm	L Perforated
	22mm(H) x 12mm x 1.5mm	L Perforated
	25mm(H) x 12mm x 1.5mm	L Perforated
HTTSB	20mm(H) x 15mm x 1.5mm/3mm	Heavy Top Loc®
	22mm(H) x 15mm x 1.5mm/3mm	Heavy Top Loc®
	27mm(H) x 15mm x 1.5mm/3mm	Heavy Top Loc®
	32mm(H) x 15mm x 1.5mm/3mm	Heavy Top Loc®
	35mm(H) x 15mm x 1.5mm/3mm	Heavy Top Loc®
Zinc	6mm(H) x 12mm x 1mm	L Perforated Resinous Floors
Aluminium	10mm(H) x 12mm x 1.5mm	L Perforated
	12mm(H) x 12mm x 1.5mm	L Perforated
	15mm(H) x 12mm x 1.5mm	L Perforated
	18mm(H) x 12mm x 1.5mm	L Perforated
	22mm(H) x 12mm x 1.5mm	L Perforated
	25mm(H) x 12mm x 1.5mm	L Perforated
		L Perforated

