

Latham Asbraloy Super Visual Stair Tread Nosings

INTERIOR & EXTERIOR APPLICATION

The Latham Asbraloy Super Visual Range of treads are specifically designed to meet the needs of AS/NZS 4586:2004, AS/NZS 4663:2002, AS/NZS 1482.4:2002, AS 1428.1:2001, AS 1428.2:1992, AS 1428.3:1992 in terms of visual requirements, whilst maintaining the slip resistant architectural finish that is synonymous with the range of Latham Asbraloy and Asbrabronz Safety Stair Tread Nosings. The products are supplied in specially formulated 20 micron anodised black finish and off white powder coated finish to match the Latham Supagrit Silicon Carbide Mineral Inserts, offering the best pedestrian safety available in a stair tread nosing.

The Latham All Black AB735 S & AB754 ST is ***specifically designed*** to be installed in conjunction with light coloured floor surroundings to emphasize the tread edge, whilst the Latham All White AW735 S & AB754S T is ***specifically designed*** to be installed in conjunction with dark colour flooring.

These treads are specifically designed to achieve the 30% luminance contrast required on the riser and tread under AS 1428.2:1992

Customers with special applications or requirements are invited to discuss them with us. Call for detailed information before specifying and ordering.

Lengths

All Asbraloy and Asbrabronz profiles are offered factory cut to the site required length (up to 4600mm in 1 continuous length) complete with countersunk holes, stainless steel or brass screws (depending on the selected section) and plastic plugs. If specified at time of order treads can be supplied in full manufacturing lengths of 4600mm for on site cutting and drilling to suit clients supplied fixings.

Factory Cutting Tolerance: +0/-3mm.

Screw Fixing Holes

Unless otherwise specified at time of order holes will be provided in the treads to suit 8 gauge stainless steel or brass screws (note details under ACCESSORIES-FIXING page 3), at Latham's standard 250mm centres. Any special machining, mitering, modifications or alternative hole locations, will be carried out at extra cost.




PRODUCT GUIDE – VS & VB SUPER VISUAL STAIR TREAD NOSINGS

Product No.	Metal Type	A	B	C	D	E
AB754 ST	Aluminium	58	50	5	75	15
AW754 ST	Aluminium	58	50	5	75	15
AB735 S	Aluminium	73	50	5	75	-
AW735 S	Aluminium	73	50	5	75	-

All measurements in millimetres

Slip Resistance Performance Testing for Asbraloy and Asbrabronz profiles can found on pages 46-47 of this catalogue.

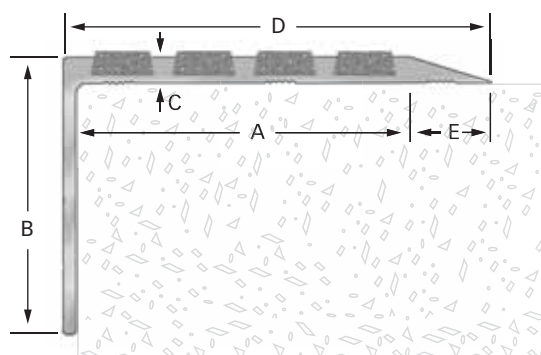

Latham Australia Pty Ltd
Fax: +61 2 9879 7666 Phone: +61 2 9879 7888

www.latham-australia.com
Email: treads@latham-australia.com



Asbraloy AB754 ST (all black)



Asbraloy AW754 ST (all white)

ILLUSTRATIONS
SCALE
FULL SIZE
(approximate)



Asbraloy AB735 S (all black)



Asbraloy AW735 S (all white)

