


XLLS Series - Seismic Movement

Flexible Mechanical Expansion Joint Cover

LATHAM AUSTRALIA PTY LTD
 14 TENNYSON ROAD GLADESVILLE 2111 AUSTRALIA
 Phone: 61 2 9879 7888 Fax: 61 2 9879 7666
 Web: www.latham-australia.com



SCALE: Not to scale
 All dimensions are to be verified before construction
 Verified By..... Date.....

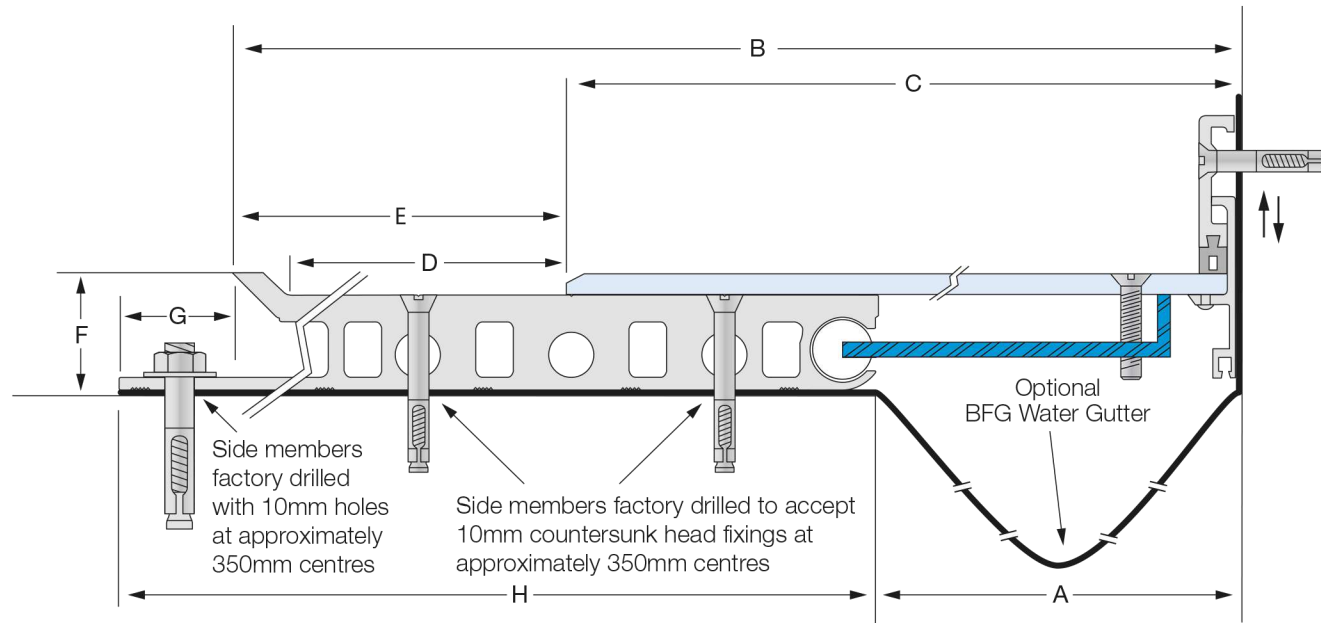

Contact your Latham Representative to discuss the application and specification of this system.

Stainless Steel Code	A	B	C	D	E	F	G	H	Movement	Total Available Movement	Cover Plate Thickness	Countersunk Head Fixings per 350mm centre
XLLS-150	150	455	305	140	150	34	30	335	+/-130mm	260mm	6mm	3
XLLS-200	200	605	405	190	200	34	30	435	+/-180mm	360mm	6mm	4
XLLS-250	250	758	505	240	253	37	30	538	+/-230mm	460mm	9mm	5
XLLS-300	300	908	605	290	303	37	30	638	+/-280mm	560mm	9mm	6
XLLS-400	400	1208	805	390	403	37	30	838	+/-380mm	760mm	9mm	8
XLLS-500	500	1510	1005	490	505	40	30	1040	+/-480mm	960mm	12mm	10
XLLS-600	600	1825	1205	590	605	40	30	1240	+/-580mm	1160mm	12mm	10

All dimensions are in millimetres.

Exterior/Interior applications.

All mechanical expansion joint fixings by others.

Aluminium fixed members with stainless steel cover plate.

The centering bar consists of two full nylon cylinders fastened at opposite ends of a flat spring steel bar. The bar is positioned diagonally across the joint opening with the cylinders inside the extruded cylindrical tracks.

Design subject to change without notice