


NEOPRENE STRESS RELIEVING CONTROL STRIPS

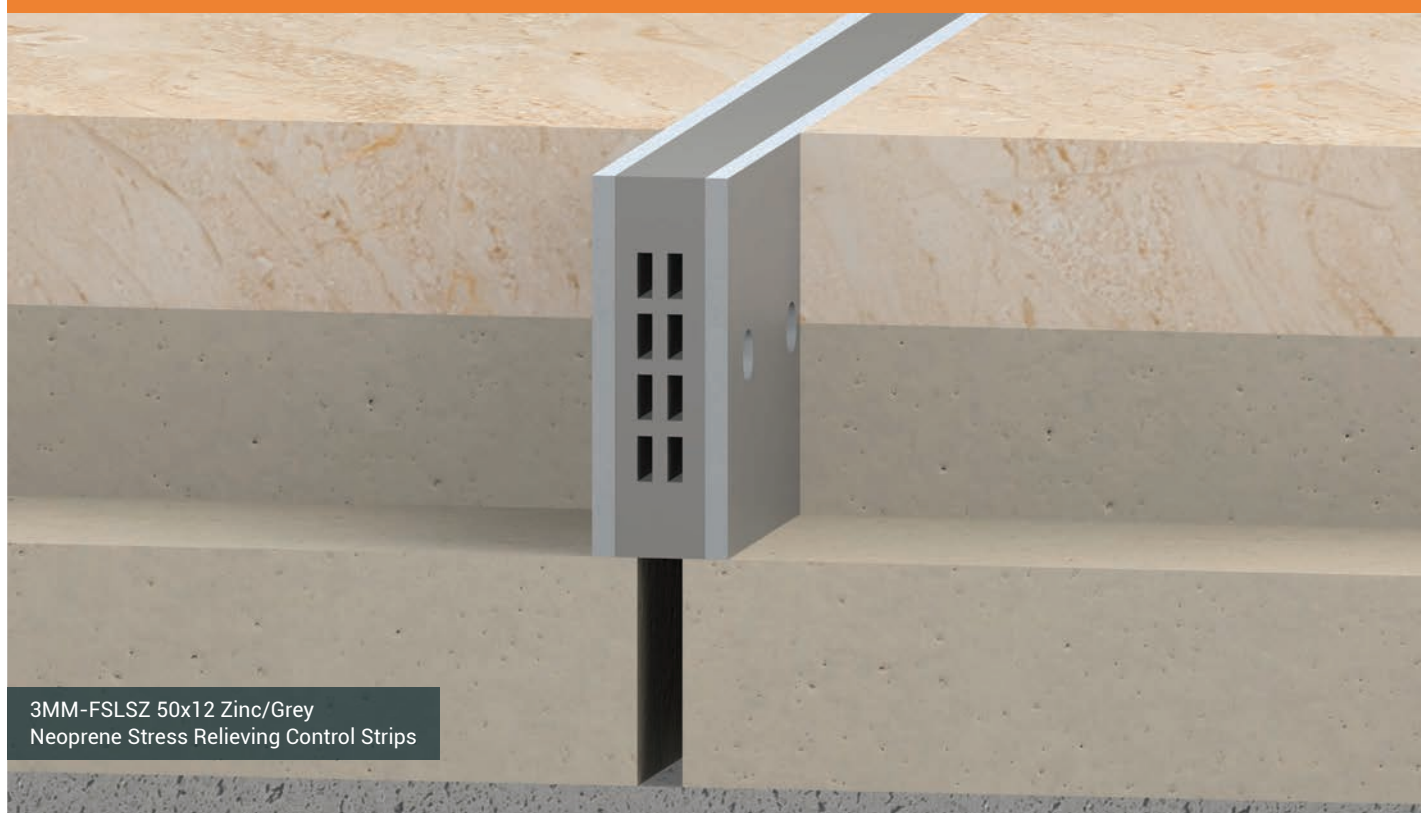

Neoprene Stress Relieving Control Strips **12MM NEOPRENE INSERT WITH 3MM SIDE PLATES**

Latham Neoprene Stress Relieving Control Strips with 12mm neoprene inserts and 3mm Brass or Zinc side plates are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked during the installation of the flooring.

These Stress Relieving Control Strips with 12mm neoprene inserts and 3mm Brass or Zinc side plates are designed to be saw cut into the finished floor, to help control expansion in the flooring surface, by relieving stress that can build up when flooring is installed without the use of control joints. Over stress floor finishes may crack or lift.


Latham Neoprene Stress Relieving Control Strips with 12mm neoprene inserts and 3mm Brass or Zinc side plates are generally considered for exterior applications where the thermal expansion of floor finishes is greater than internal floor applications. They are also suitable for internal applications as well and are sometimes considered when architects and clients want to extend the bay size and increase the distance between control strips (see pages 4-6 for further set out and spacing details).

Latham Neoprene Stress Relieving Control Strips with 12mm neoprene inserts and 3mm Brass or Zinc side plates are supplied in standard 1800mm lengths and should be installed so as to minimise the frequency of butt joints and short lengths. Also 3-way and 4-way butt joint intersections should be avoided (see page 54 for further details).


Latham Neoprene Stress Relieving Control Strips should be installed in all locations of stress concentration; at changes in direction; wherever localised movement is anticipated and around rigid and fixed large objects such as columns, stair and lift wells, light posts, across driveways, at access covers, across doorways and anywhere that may impede expansion and contraction of the floor finish.

For further information and specification details available, see page 55 or for full details visit our website www.latham-australia.com


12MM NEOPRENE INSERT-3MM SIDE PLATES

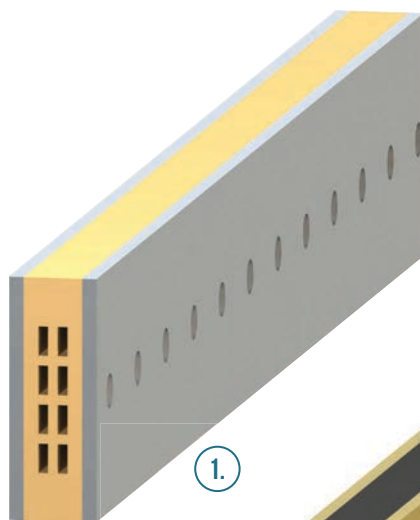

1.

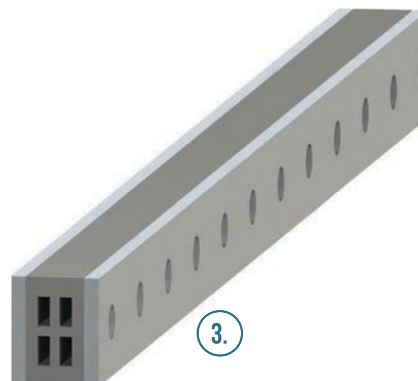

3.

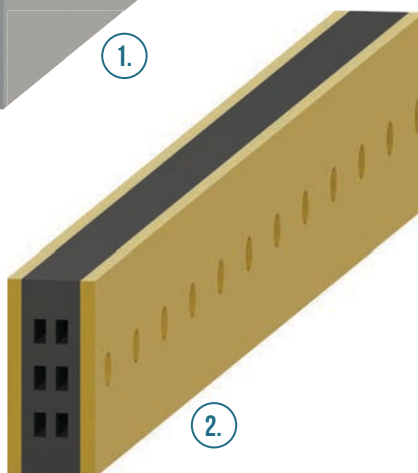

2.



1. 3MM-FLSSZ 50X12 ZINC/BUFF
2. 3MM-FLSSB 40X12 BRASS/BLACK
3. 3MM-FLSSZ 22X12 ZINC/GREY

GENERAL PRODUCT INFORMATION

- Supplied in standard lengths of 1800mm.
- Latham Neoprene Stress Relieving Control Strips are designed to be used in applications where Latham Neoprene-X-Pansion Loc® or Tile Strips have been overlooked when the floor finish is installed.
- Product profile illustrations approximately 66% full size.

12 MM WIDE NEOPRENE STRESS RELIEVING CONTROL STRIPS WITH 3MM SIDE PLATES PROFILE GUIDE

Specify Neoprene Colour

Brass (1mm thick side plates)	Zinc (1mm thick side plates)	Metal Side Plate Depth
3MM-FSLSB- 22 x 12	3MM-FLSZ-22 x 12	22mm
3MM-FSLSB- 31 x 12	3MM-FLSZ-31 x 12	31mm
3MM-FSLSB- 40 x 12	3MM-FLSZ-40 x 12	40mm
3MM-FSLSB- 50 x 12	3MM-FLSZ-50 x 12	50mm
3MM-FSLSB- 65 x 12	3MM-FLSZ-65 x 12	65mm

☛ Custom heights to accommodate custom floor finish thicknesses available on request.
☛ Contact Latham Australia with your requirements.



- FORM ✓
- FUNCTION ✓
- SAFETY ✓
- SUSTAINABILITY ✓
- QUALITY ✓
- COMMERCIALITY ✓
- INNOVATION ✓

NEOPRENE INFILL COLOUR OPTIONS

BU Buff **GR** Grey **BL** Black

METAL SIDE PLATE OPTIONS

BR Brass 3mm **ZN** Zinc 3mm