

Latham Dirt Control Entry Mats and Mat Frames

Specifications and Ordering Detail for Recess Mounted & Surface Mounted Roll-Up Mats

When ordering clearly specify walking direction, colour, infill, overall dimensions (A) and (B).

Furnish and install Entry Mats to the following specification, as supplied by Latham Australia Pty Ltd, ph +612 9879 7888, fax +612 9879 7666. Latham Roll-Up *(RDCC - recessed carpet)/(RSA-recessed abrasive)/(RDCV - recessed vinyl)/(SDCC - surface mounted carpet)/(SAA - surface mounted abrasive)/(SDCV - surface mounted vinyl) entry mat (A)..... x (B)..... in colour..... (grey standard), aluminium to be *(standard clear anodised)/(bright bronze gold anodised)/(bronze anodised). *Delete that which does not apply.

Construction: A series of aluminium tread rails are spaced at 50mm centres and connected by a continuous neoprene hinge with uniform perforations to allow the effective control of water and small debris. Treads to run counter to walking direction, with tread surfaces to be either carpet, abrasive or vinyl. Available in recessed style for installation into surround frame, or surface mounted.

Finish: Tread Rails and recessed frame to be fabricated of 6063-T6 alloy in clear anodised finish. Optional finishes *(standard clear anodised)/(bright bronze gold anodised)/(bronze anodised). *Delete that which does not apply.

Surface Treads

Carpet: Tread rails shall be 100% nylon fibre face. Carpet unitary fusion bonded to guard against fraying, delamination or moisture penetration. Carpet to be positively locked into extruded aluminium tread rails. Colours to be selected from Latham Australia's standard colour range.

Abrasive: Tread Rails shall have continuous Latham Supagrit™ Slip Resistant Abrasive surface. Colours to be selected from Latham Australia's standard colour range.

Vinyl: Tread Rails shall have continuous Latham Ribbed Vinyl surface. Colours to be selected from Latham Australia's standard colour range.

Mat Frames: Furnish and install Entry Mat Frames to the following specification, as supplied by Latham Australia Pty Ltd, ph +612 9879 7888, fax +612 9879 7666. Entry Mat Frame type *(AAF - aluminium standard)/(BAF - brass) size *(12 x 12 x 3mm standard)/(15 x 15 x 3mm)/(20 x 20 x 3mm)/(25 x 25 x 3mm)/(30 x 30 x 3mm)/(40 x 40 x 3mm)/(50 x 50 x 3mm)/(ACKD-10 aluminium cast-in place 45 x 90 x 12mm)/(BCKD-10 brass cast-in place 25 x 25 x 3mm) to suit. *Delete that which does not apply.

Special Note: Consult with Latham Australia Engineering Division, where shaped recessed mats are required, and where recessed mats are to be installed in direct sunlight to allow for coefficient of linear expansion of metal components.

Maintenance: Vacuum for dirt control. Wash carpet, abrasive and vinyl with Latham Gold-Chem Mat Wash 22XX. Note: Mats must be rolled up before moving, they must not be dragged.

Latham Access Covers and Frames



Latham Aluminium Access Covers and Liners offer many benefits over similar products fabricated from steel or cast iron. Aluminium cover plates are lightweight, corrosion resistant and attractive. Optional trench liners simplify installation and offer improved performance. Call for details and specifications.

Latham Access Covers offer yet another alternative to floor access and drainage.

Access covers can be specified with the same plates that are available for trench covers.

Latham Access Covers are economical and provide an attractive modern appearance.

Covers include vinyl seals which cushion against rattles and serves as a moisture/fume barrier

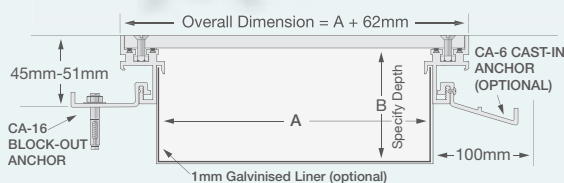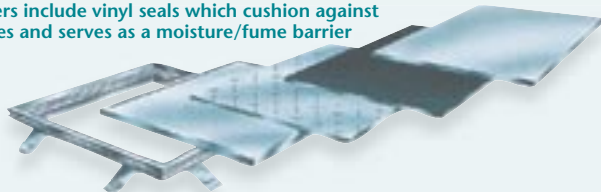

Deck Thickness: 6mm, 9mm, 12mm
Trench Widths: 150mm, 200mm, 300mm, 450mm, 600mm (Specify 'A')
Trench Liners: Where required 22 Gauge GALVABOND (Specify 'B')
Anchor Systems: Cast-in place or Blackout - splicing members available

Deckplates

Type S: Smooth Plate; Standard cover plate in mill finish aluminium or stainless steel.

Type A: Abrasive Coating; Asbra SAF-T in a black colour provides slip resistance.

Type D: Diamond Tread; Raised tread provides increased traction and safety.

Type R: Round Holes; Holes allow for drainage and ventilation. 12mm holes 50mm x 50mm centres.

Type H: Slotted Holes; Holes allow for drainage and ventilation. 12mm x 75mm slots, 50mm O.C. in with. 125mm O.C. in length.

Type T: Tile Recess; Thin floor finishes can be installed with 1.5mm recess for improved appearance

Typical Access Cover Sizes

250mm x 250mm, 300mm x 300mm, 350mm x 350mm, 400mm x 400mm, 500mm x 500mm, 600mm x 600mm (For overall dimensions add 62mm)

