

ASMP PAVA Series

Flexible Mechanical Expansion Joint Cover

LATHAM AUSTRALIA PTY LTD
 14 TENNYSON ROAD GLADESVILLE 2111 AUSTRALIA
 Phone: 61 2 9879 7888 Fax: 61 2 9879 7666
 Web: www.latham-australia.com




ILLUSTRATED: ASMP PAVA

Not to Scale

All dimensions are to be verified before construction

Verified By..... Date.....

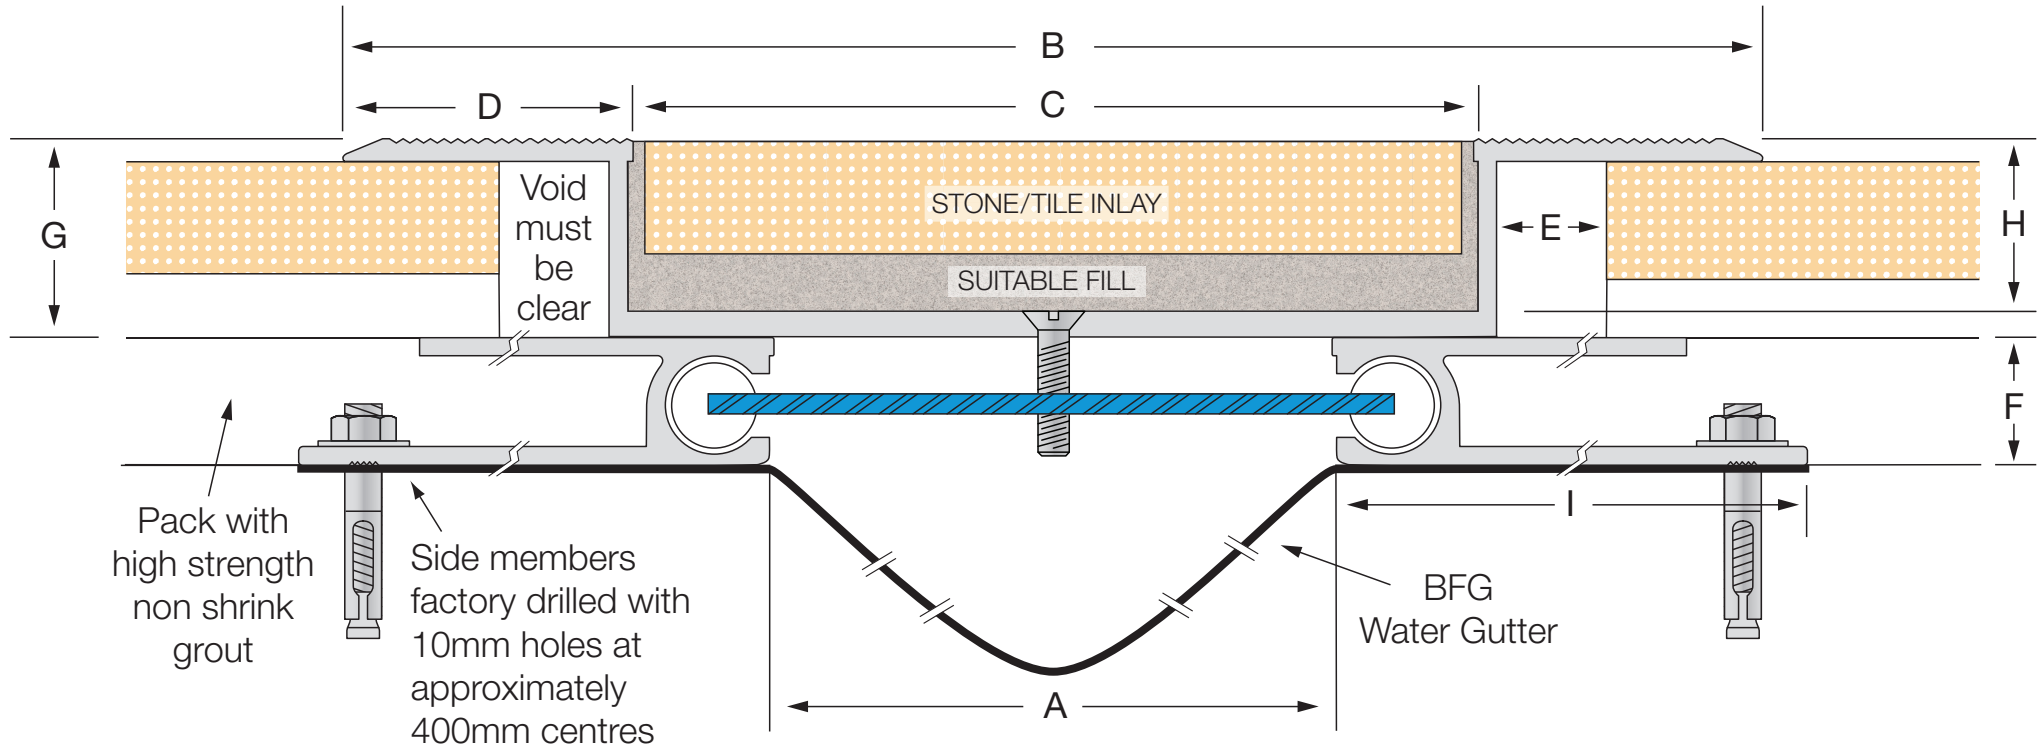

Contact your Latham Representative to discuss the application and specification of this system.

Aluminium Code Serrated Flange	A	B	C	D	E	F	G	H	I	Movement	Total Movement	Cover Thickness
ASMP-25	25	250	150	50	25	22	35	30	100	+45/-15mm	60mm	4mm
ASMP-50	50	250	150	50	25	22	35	30	100	+45/-40mm	85mm	4mm
ASMP-75	75	250	150	50	25	22	35	30	100	+/-45mm	90mm	4mm
ASMP-100	100	250	150	50	25	22	35	30	100	+/-45mm	90mm	4mm

All dimensions are in millimetres.

Suitable for joint widths up to 100mm. The minimum overall recess required to accommodate this system regardless of the joint width is 315mm. Recessing of the stone as detailed above is not necessary. The product can simply sit on the surface of the stone as per photo.

Exterior/Interior applications.

All mechanical expansion joint fixings by others.

The centering bar consists of two full nylon cylinders fastened at opposite ends of a flat spring steel bar. The bar is positioned diagonally across the joint opening with the cylinders inside the extruded cylindrical tracks.

Design subject to change without notice

COPYRIGHT © 2009
LATH3513