

LATHAM DIRT CONTROL ROLL UP ENTRY MATS

DIRT CONTROL, ROLL UP ENTRY MATS AND MAT FRAMES

SURFACE MOUNTED AND RECESS MOUNTED ROLL UP ENTRY MATS AND MAT FRAMES. COMMERCIAL AND INDUSTRIAL USE.

Latham have been designing and manufacturing entry mats to the highest level, for over 30 years. The Latham range of Entry Mats have been specifically designed to facilitate dirt and water control. Research indicates that over 70% of dirt, dust, and moisture, in regular occurrences and uses, enters a building via foot and wheeled traffic.

These contaminants cause damage and wear on floor finishes, they increase cleaning and maintenance costs, reduce the life cycle of the entrance flooring and can also cause pedestrian safety issues like slips or falls. For these reasons, it is imperative that a suitable dirt control flooring system be considered for commercial and high traffic entrances.

The Latham Entry Mat systems consist of extruded aluminium tread rails which carry factory installed infills of either abrasive for slip resistance, carpet for dirt control or vinyl for limited slip resistance and dirt control. The systems are continuously hinged with neoprene joints which reduce traffic noise and rattle. The easy to install, versatile roll up mat, either recessed or surface mounted, has many commercial and industrial applications. In entry ways or in service areas of apartments, offices, hotels, motels, retail shops, malls, restaurants, bars, schools, churches, factories.

The unique neoprene hinge design allows easy roll up and eliminates metal to metal contact and corrosion lock up.

Factory perforated 12mm x 4mm elongated slots in the neoprene hinge ensures dirt, moisture and debris is directed under the mat for future collection.

Systems that are slot free, may remove moisture and dirt from shoes, but without the slots to control the dirt, these contaminants are tracked across the mat onto the floor.

Mats can be vacuumed over or easily rolled back to remove collected soil and moisture from beneath.

Construction

A series of aluminium tread rails are spaced at 50mm centres and connected by a continuous neoprene hinge with uniform perforations to allow the effective control of water and small debris. Treads should run counter to walking direction, with tread surfaces to be either carpet, abrasive or vinyl. Available in recessed style for installation into surround frame, or surface mounted.


Finish

Aluminium tread rails and frames are fabricated from 6063-T6 alloy. Tread rails will be supplied in clear anodised standard finish or optional gold anodised, bronze anodised or black anodised on request. Standard AAF aluminium frames will be supplied in clear anodised finish whilst all other frames will be supplied in mill finish brass. Other custom or non-stocked metal colours may be available by request at additional delay and charge.





GENERAL INFORMATION

STANDARD DIMENSIONS

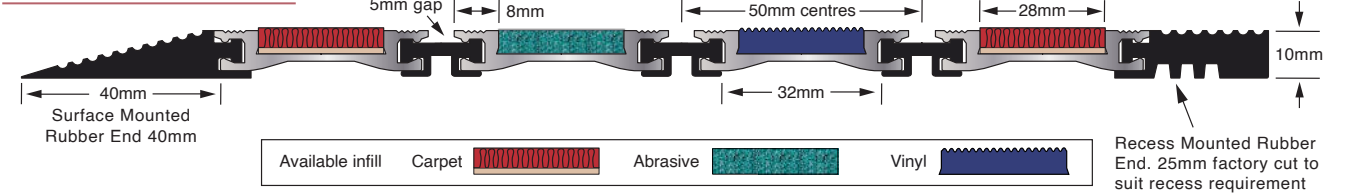

AVAILABLE CONFIGURATIONS FLOOR MAT WIDTH: "A" FLOOR MAT LENGTH: "B"

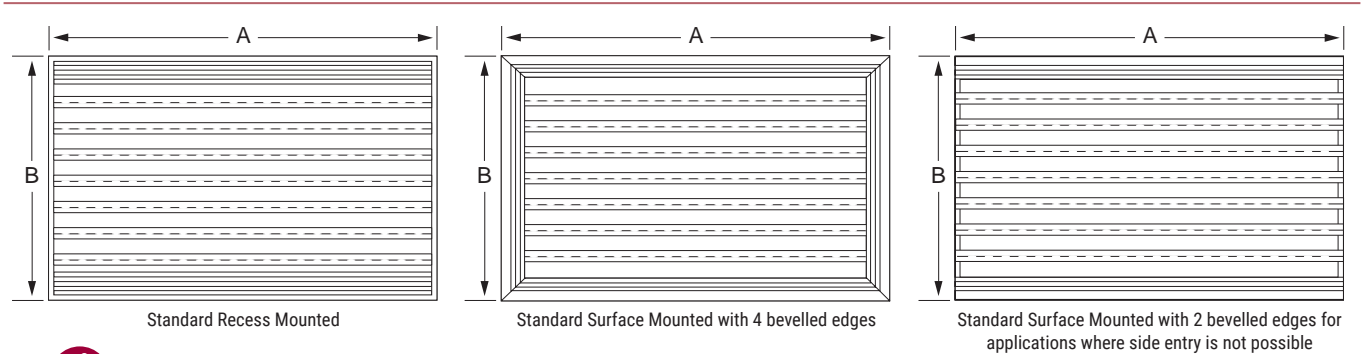

	For more detailed information and specifications on dirt control entry mats review Latham Flooring Systems 6
Maintenance	Vacuum for dirt control. This can be as simple as vacuuming over the mat. From time to time Lathams suggest rolling up the entry mats and cleaning beneath them, which will have trapped dirt, moisture and debris that has been collected by the mat.
Gold Chem Mat Wash 22XX	All Latham entry mats should be washed from time to time using Latham Gold Chem Mat Wash 22XX. This is designed specifically for use with the mats, will not harm the inserts or aluminium extrusions, and will invigorate the inserts and mat finishes.
Special Note	Mats must be rolled up before moving. They must not be dragged.

METAL FINISHES

ALUMINIUM TREAD RAILS

Standard finish is clear anodised. Bright gold, black and bronze are available as optional stock colours. Clear anodised finish will be supplied unless otherwise specified.



CLEAR ANODISED
(STANDARD)



BRIGHT GOLD ANODISED



BLACK ANODISED



BRONZE ANODISED

The Latham Entry Mat systems consist of extruded aluminium tread rails which carry factory installed infills of either abrasive for slip resistance, carpet for dirt control or vinyl for limited slip resistance and dirt control.



GOOD DESIGN
AWARD
WINNER



TREAD RAIL INFILLS & COLOURS

SUPAGRIT ABRASIVE INFILL – SLIP RESISTANCE – RSA/SSA COLOUR RANGE

Supagrit™ for slip resistance. Tread rail infill shall have continuous Latham Supagrit Slip Resistant Abrasive Surface. Colours can be selected from Latham Australia's standard colour range.

Standard Supagrit abrasive insert colour is silver grey. Standard insert colour will be supplied unless otherwise specified.



SILVER GREY



BLACK



BROWN



TERRACOTTA



TEAK



BUFF



CACTUS GREEN



TEAL



BLUE



BLUE GREY



SAFETY YELLOW



OFF WHITE




ROSE



SMOKE



PLUM



*LUMO

*Lumo Luminescent glow-in-the-dark infill. The Lumo Luminescent pale green infill temporarily glows in the dark after exposure to artificial or natural light.



CARPET INFILL – DIRT CONTROL – RDCC/SDCC COLOUR RANGE

Carpet for dirt control. Tread rail infill is nylon fibre face carpet. Carpet unitary fusion bonded to guard against fraying, delamination or moisture penetration. Carpet to be positively locked into extruded aluminium tread rails. Colours can be selected from Latham Australia's standard colour range.

Standard carpet insert colour is grey. Standard insert colour will be supplied unless otherwise specified.



GREY



BLACK




BROWN



RUST



TEAK



BUFF



CHARCOAL



GREEN



ROYAL BLUE



RED



GOLD




VYNIL INFILL – LIMITED SLIP RESISTANCE AND DIRT CONTROL – RDCV/SDCV COLOUR RANGE

Vinyl for limited slip resistance and dirt control. Tread rail infill is continuous Latham Ribbed Vinyl Surface. Colours can be selected from Latham Australia's standard colour range. Note: RDCV and SDCV should not be considered for external applications or application in direct sunlight.

Standard vinyl insert colour is grey. Standard insert colour will be supplied unless otherwise specified.



GREY



BLACK



BLUE



RUST

ENGINEERED AND DESIGNED FOR ULTIMATE PERFORMANCE

RECESS MOUNTED ENTRY MATS & FRAMES

Latham’s range of recess mounted entry mats are designed to sit in a mat well and be flush with the surrounding floor finish. These should be considered over surface mounted mats where possible.

The systems are available with 3 infill types and Lathams recommend that entry mats are installed in surround frames.

A frame helps protect the edges of the surrounding floor finish from damage that may be caused by wheeled traffic and other pressures

that may come in contact with edge of the exposed floor finish.


Latham can supply block-out or cast-in frames as shown below for our recessed entry mats.

The integrated neoprene hinging system in the Latham range of Entry Mats not only limits noise and vibration and controls water and dirt, but also acts as a brake on the mats ensuring any tracking due to one directional large volumes of traffic is limited.

TYPE RDCC CARPET INFILL

Recess mounted: Carpet infill for dirt control.
Standard insert colour grey. Standard insert colour will be supplied unless otherwise specified.


**RUST
CARPET INFILL**

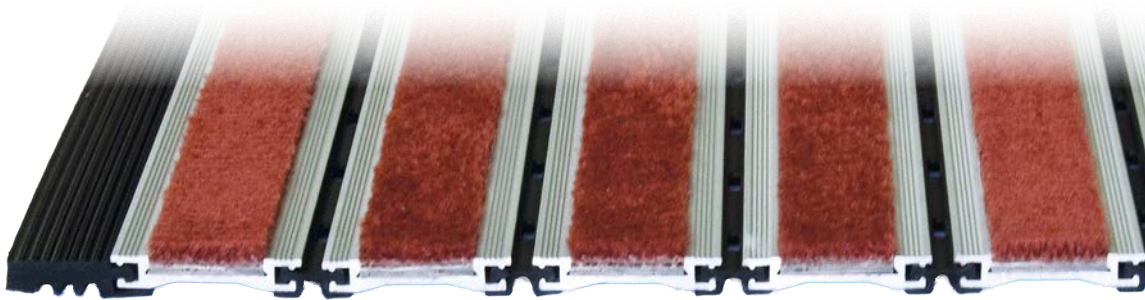

TYPE RSA SUPAGRIT INFILL

Recess mounted: Supagrit abrasive infill for slip resistance. Standard insert colour silver grey.
Standard insert colour will be supplied unless otherwise specified.


**SILVER GREY
SUPAGRIT INFILL**

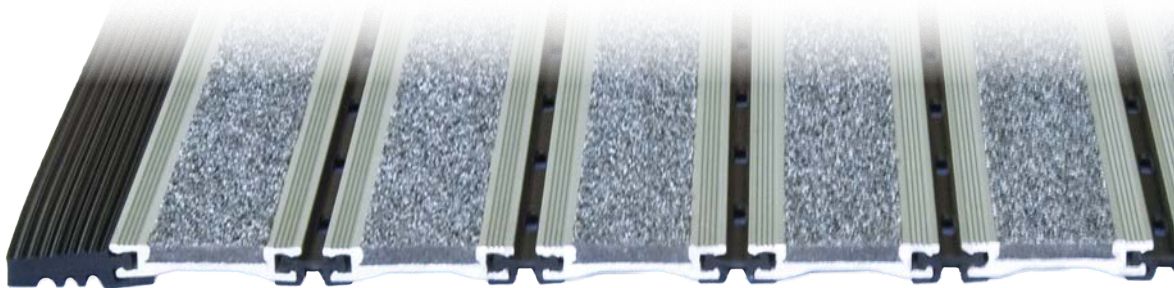

TYPE RDCV VINYL INFILL

Recess mounted: Vinyl infill for limited slip resistance & dirt control. Standard insert colour grey.
Standard insert colour will be supplied unless otherwise specified.

BLACK VINYL INFILL

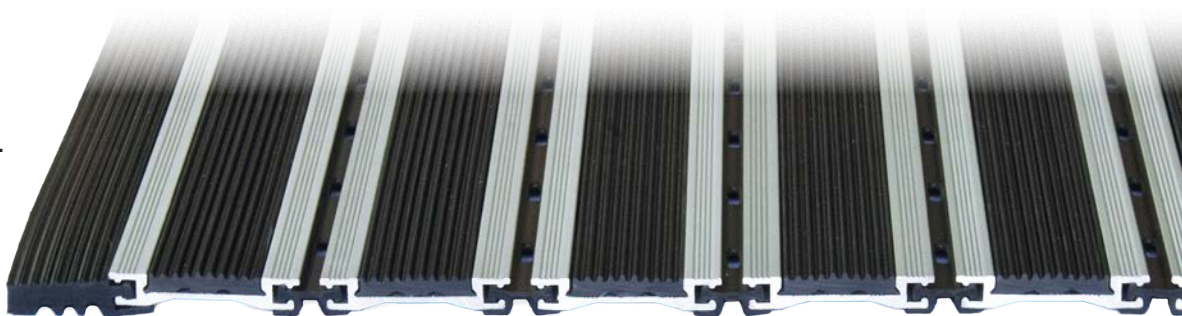


MAT FRAMES

Mat frames must be level filled to mat depth with levelling compound or cement mix.

Mat must be fully supported on a level surface. For correct installation all mat frames should be delivered with the mats.

All standard aluminium mat frames are supplied in clear anodised finish. All other frames will be supplied mill finish brass.

FRAMES AVAILABLE	
12mm x 12mm x 3mm (standard)	
15mm x 15mm x 3mm	
20mm x 20mm x 3mm	
25mm x 25mm x 3mm	
50mm x 50mm x 3mm	

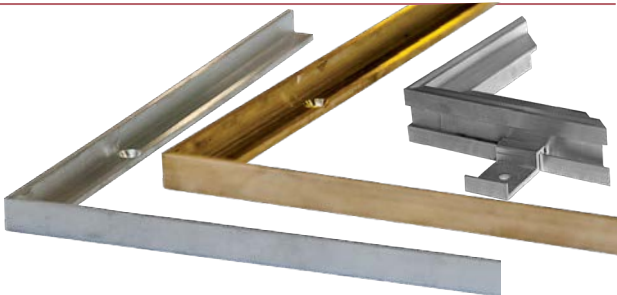

SURFACE MOUNTED ENTRY MATS

Latham’s Range of surface mounted entry mats are supplied standard with ramped/tapered edges on all 4 sides. This means that traffic can approach from any direction without the possibility of tripping over the raised mat. When the mats are being installed between 2 walls they can be supplied with the front and back ramped/tapered strips only.

The integrated neoprene hinging system in the Latham range of Entry Mats not only limits noise and vibration and controls water and dirt, but also acts as a brake on the surface mounted mats ensuring

any tracking due to one directional large volumes of traffic is limited. The systems are available with 3 infill types as detailed below. For style and colour range details see page 9.



GOOD
DESIGN
AWARD®
WINNER




TYPE SDCC CARPET INFILL - DIRT CONTROL

Surface mounted: Carpet infill for dirt control.
Standard insert colour grey. Standard insert colour will be supplied unless otherwise specified.

RUST CARPET INFILL

RAMPED 4 SIDES STANDARD.
2 SIDES ON REQUEST [SPECIFY]

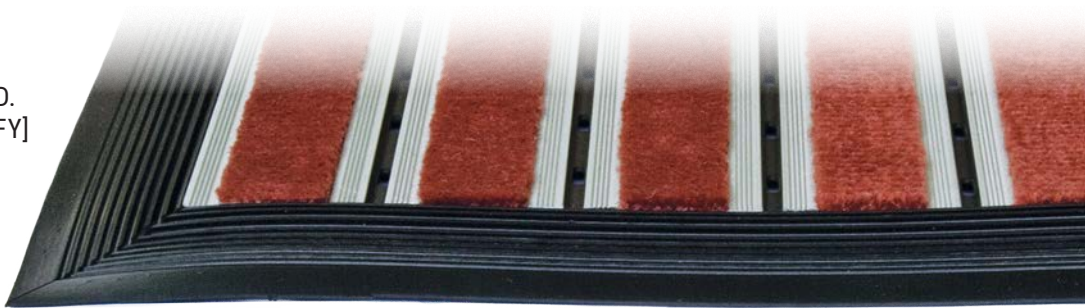


TYPE SSA SUPAGRIT INFILL - SLIP RESISTANCE

Surface mounted: Supagrit abrasive infill for slip resistance.
Standard insert colour silver grey. Standard insert colour will be supplied unless otherwise specified.

SILVER GREY
SUPAGRIT INFILL

RAMPED 4 SIDES STANDARD.
2 SIDES ON REQUEST [SPECIFY]

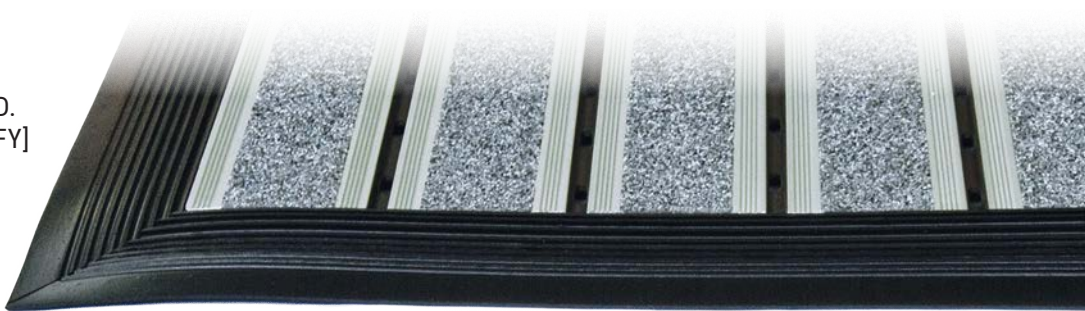


TYPE SDCV VINYL INFILL - LIMITED SLIP RESISTANCE & DIRT CONTROL

Surface mounted: Vinyl infill for limited slip resistance & dirt control.
Standard insert colour grey. Standard insert colour will be supplied unless otherwise specified.

BLACK
VINYL INFILL

RAMPED 4 SIDES STANDARD.
2 SIDES ON REQUEST [SPECIFY]

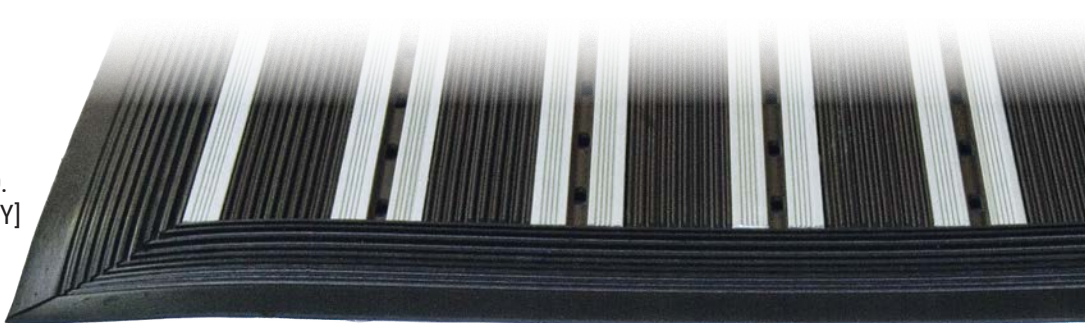

For more detailed information and specifications on dirt control entry mats review Latham Flooring Systems 6

Maintenance	Vacuum for dirt control. This can be as simple as vacuuming over the mat. From time to time Lathams suggest rolling up the entry mats and cleaning beneath them, which will have trapped dirt, moisture and debris that has been collected by the mat.
Gold Chem Mat Wash 22XX	All Latham entry mats should be washed from time to time using Latham Gold Chem Mat Wash 22XX. This is designed specifically for use with the mats, will not harm the inserts or aluminium extrusions, and will invigorate the inserts and mat finishes.
Special Note	Mats must be rolled up before moving. They must not be dragged.

BLOCK-OUT & CAST-IN MAT FRAMES




- ▶ Mat frames must be level filled to mat depth with levelling compound or cement mix.
- ▶ The mat must be fully supported on a level surface.
- ▶ For correct installation, all mat frames should be delivered with the mats.
- ▶ All standard aluminium mat frames are supplied in clear anodised finish. All other frames will be supplied mill finish.
- ▶ AAF Aluminium and BAF Brass Angle Frames [Block-Out] will be supplied with mitre cut ends for site butting and adjusting.
- ▶ Frames will be supplied complete with countersunk holes in the base of the frame, and screws and plugs.
- ▶ The ACKD-10 Frame [Cast-In] will be supplied with location guides that can be screwed, or riveted through to facilitate easier setup on site.


STANDARD BLOCK-OUT ANGLE FRAMES - ALUMINIUM & BRASS

Standard Block-Out: 12mm x 12mm x 3mm

AAF aluminium angle frames will be supplied unless otherwise specified.

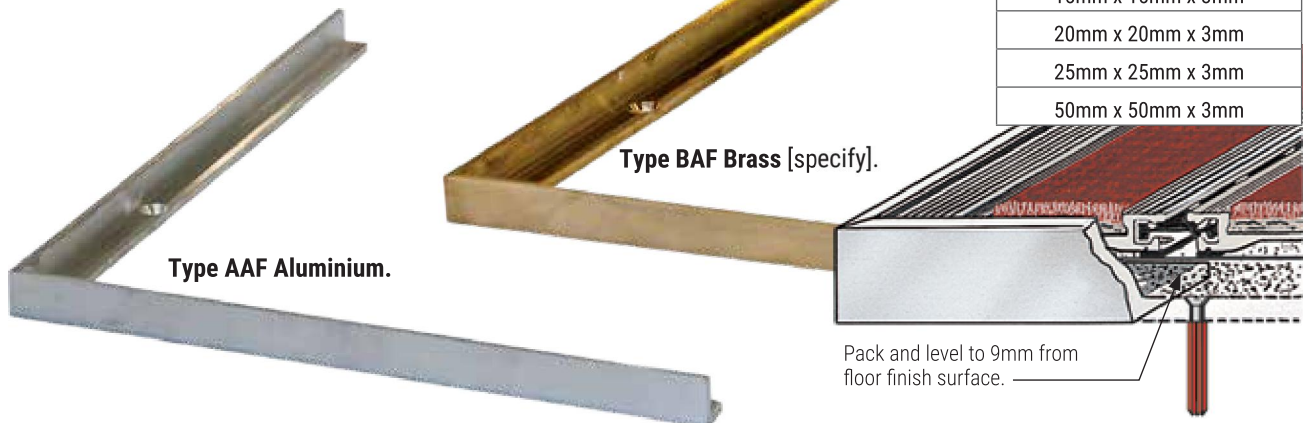

TYPE ACKD-10 CAST-IN ALUMINIUM FRAME

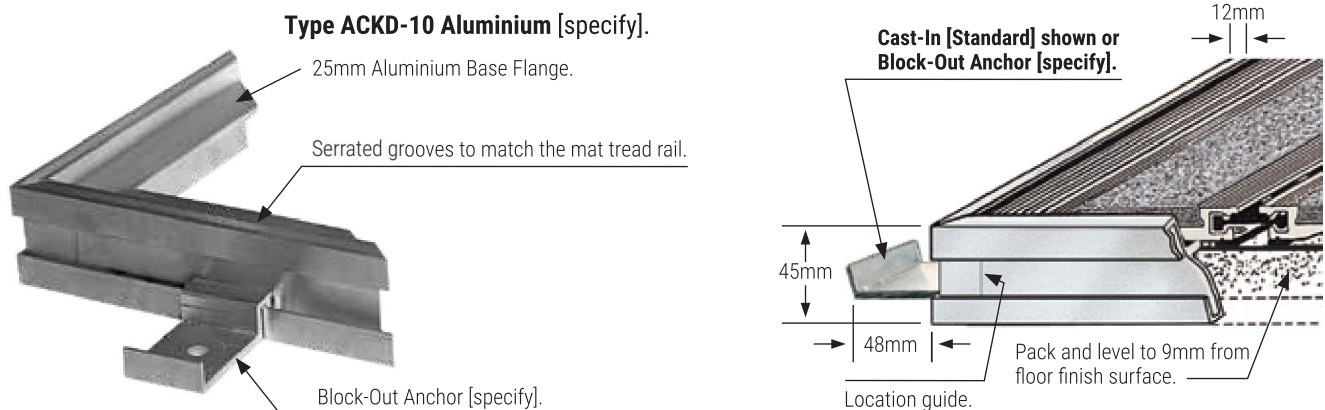

ORDERING DETAILS



ORDERING DETAILS - MATS

Furnish and install entry mats to the following specification, as supplied by Latham Australia Pty Ltd.
www.latham-australia.com, ph: +612 9879 7888,
fax: +612 9879 7666, email: info@latham-australia.com

Latham Roll-Up *[RDCV-recessed carpet] / [RSA-recessed abrasive] / [RDCV-recessed vinyl] / [SDCC-surface mounted carpet] / [SAA-surface mounted abrasive] / [SDCV-surface mounted vinyl] entry mat (A)..... x (B)..... in colour..... (grey standard), aluminium to be *[standard clear anodised] / [bright gold anodised] / [bronze anodised].

*Delete that which does not apply.

ORDERING DETAILS - FRAMES

Furnish and install entry mat frames to the following specification, as supplied by Latham Australia Pty Ltd.
www.latham-australia.com, ph: +612 9879 7888,
fax: +612 9879 7666, email: info@latham-australia.com

Entry Mat Frame Type *[AAF-aluminium (standard)] / [BAF-brass], size *[12 x 12 x 3mm (standard)] / [15 x 15 x 3mm] / [20 x 20 x 3mm] / [25 x 25 x 3mm] / [50 x 50 x 3mm]. **Entry Mat Frame Type** [ACKD-10 aluminium cast-in place 45 x 90 x 12mm].

*Delete that which does not apply.

SPECIAL NOTE

Where recessed mats are to be installed in direct sunlight, special consideration should be given to the thermal coefficient of

linear expansion of the metal, which is approximately 0.25mm per lineal metre of metal per 10 degrees Celsius in temperature change of the metal (note temperature change in the metal surface can be as dramatic 50°C+ depending on the location). All mats will be manufactured under frame size, when Latham's supply the frame. Generally the mat will be 3-4mm smaller than the internal frame size to allow for fitting and cleaning. This will be increased for larger mats to allow for linear expansion of the metal.

In these direct sunlight applications, Lathams also recommend the slip-resistant abrasive or dirt control carpet insert as vinyl inserts have a higher propensity to expand and contract. Please discuss with your Latham representative.



COMPONENT SPECIFICATIONS



CONSTRUCTION

A series of aluminium tread rails are spaced at 50mm centres and connected by a continuous neoprene hinge with uniform perforations to allow the effective control of water and small debris. Treads should run counter to walking direction, with tread surfaces to be either carpet, abrasive or vinyl. Available in recessed style for installation into surround frame, or surface mounted.

FINISH

Aluminium tread rails and frames are fabricated from 6063-T6 alloy. Tread rails will be supplied in clear anodised standard finish or optional gold anodised or bronze anodised on request. Standard AAF aluminium frames will be supplied in clear anodised finish whilst all other frames will be supplied in mill finish. Anodised, other custom or non-stocked metal colours may be available by request at additional delay and charge.

TREAD RAIL INSERT TYPES

Carpet

Tread rail infill shall be 100% nylon fibre face carpet. Carpet is unitary fusion bonded to guard against fraying, delamination or moisture penetration. Carpet to be positively locked into extruded aluminium tread rails. Colours to be selected from Latham Australia's standard colour range.

Abrasive

Tread rail infill shall have continuous Latham Supagrit™ Slip Resistant Abrasive Surface. Colours to be selected from Latham Australia's standard colour range.

Vinyl

Tread rail infill shall have continuous Latham Ribbed Vinyl Surface. Colours to be selected from Latham Australia's standard colour range.

MAINTENANCE

Vacuum for dirt control. This can be as simple as vacuuming over the mat. From time to time Latham's suggest rolling up the entry mats and cleaning out the well, which will have trapped dirt, moisture and debris, that has been collected by the mat.

All Latham entry mats should be washed from time to time using Latham Gold Chem Mat Wash 22XX. This is designed specifically for use with the mats, will not harm the inserts or aluminium extrusions, and will invigorate the inserts and mat finishes.

Note:

Mats must be rolled up before moving, they must not be dragged.

SLIP RESISTANT TESTING & FIRE TESTING – ENTRY MATS



Latham Australia strive to keep on top of the requirements for new and changing standards. We run internal wear and colour fastness tests on a regular basis and slip resistance and fire tests have been carried out on all of our entry mat systems.

NATA ACCREDITED INDEPENDENT LABORATORY TESTING

Latham Australia Pty Ltd has had independent testing carried out by a NATA accredited laboratory in Accordance with AS 4586-2013 Slip resistance classification of new pedestrian surface materials - Appendix A

Classification of Pedestrian Surface Materials According to the AS 4586 Wet Pendulum Test

Class	Pendulum SRV (see note 1)	
	Slider 96	Slider 55
P5	>54	>44
P4	45-54	40-44
P3	35-44	35-39
P2	25-34	20-39
P1	12-24	<20
P0	<12	

Notes:

1. While slider 96 or slider 55 rubbers may be used, the test report shall specify the rubber that was used.
2. It is expected that these surfaces will have greater slip resistance when dry.
3. SDV may be calculated by using the tables that are given in Appendix F, and the minimum SRV that is considered appropriate for a level surface (see examples given in Appendix F).

Adapted from AS 4586-2013 Table 2

The established results are detailed as follows:

Latham Recess and Surface Mounted Dirt Control Carpet Entry Mats

- ▶ Slip Resistance Value (SRV) - Slider 55: 63
- ▶ Classification according to Appendix A: P5

Latham Recess and Surface Mounted Dirt Control Vinyl Entry Mats

- ▶ Slip Resistance Value (SRV) - Slider 55: 34
- ▶ Classification according to Appendix A: P2
- ▶ Slip Resistance Value (SRV) - Slider 55: 43*
- ▶ Classification according to Appendix A: P4*

Latham Recess and Surface Mounted Dirt Control Abrasive Entry Mats

- ▶ Slip Resistance Value (SRV) - Slider 55: 46
- ▶ Classification according to Appendix A: P5

*Testing was conducted in the direction of travel.

All Latham Recess and Surface Mounted Entry Mats with carpet inserts, silicon carbide mineral slip resistant inserts and vinyl inserts have been independently tested by AWTA Product Testing in accordance with AS ISO 9239.1-2003 Part 1 for a determination of the Burning Behaviour using a Radiant Heat Source. See certified AWTA Product Testing certificates below.

AWTA PRODUCT TESTING - BURNING BEHAVIOUR USING A RADIANT HEAT SOURCE

RDCC/SDCC Results

- ▶ Sample Identification: Latham RDCC/SDCC Entry Mats with Carpet Inserts.
- ▶ Average Critical Radiant Flux/Critical Heat Flux: 10.5 kW/m².
- ▶ Average smoke value: 176% min.

RDCV/SDCV Results

- ▶ Sample Identification: Latham RDCV/SDCV Entry Mats with Vinyl Inserts.
- ▶ Average Critical Radiant Flux/Critical Heat Flux: 9 kW/m².
- ▶ Average smoke value: 386% min.

RSA/SSA Results

- ▶ Sample Identification: Latham RSA/SSA Entry Mats with Supagrit™ Silicon carbide Inserts.
- ▶ Average Critical Radiant Flux/Critical Heat Flux: 6.7 kW/m².
- ▶ Average smoke value: 658% min.

For full test results these certificates are available at www.latham-australia.com in downloadable PDF format.

ATTAR
Advanced Technology Testing and Research

NATA Accredited for compliance with AS/NZS 4586:2013
Accreditation Number: 2700

REPORT 18/13142.9
17 August 2018

WET PENDULUM SLIP RESISTANCE TEST
Latham RDCC/SDCC Carpet Insert Entry Mats

Prepared for: Adam Latham
Latham Australia Pty Ltd
14 Tennyson Road
GLADESVILLE NSW 2111

Specimen Description: Latham RDCC/SDCC Carpet Insert Entry Mats, 250x250 mm.

No. of Specimens: 5 off (Sampling Conducted by Client)

Specimen Preparation: Washed with water and pH neutral detergent, rinsed then dried.

Test Condition & Slope: Unfixed, 0°

Test Direction: Test conducted parallel with surface profile.

Air Temperature: 21°C

Test Standard: AS 4586-2013 Slip resistance classification of new pedestrian surface materials, Appendix A - Wet Pendulum Test

Test Location: ATTAR Unit 1, 64 Bridge Road, Keysborough.

Test Date: 16 August 2018

Test Equipment: Muro Stanley Pendulum Skid Resistance Tester Serial Number 0320, Calibrated 03/05/2018.

Slider Rubber: Slider 55 Batch No. #04 prepared on P400 & 3µm lapping film.

Test Personnel: Dale Siegle

Specimen Number	1	2	3	4	5
Mean British Pendulum Number (BPN)	66	60	64	62	64
Slip Resistance Value (SRV)	63				
Classification	P5 - Surface Tested Wet				

These results apply only to the specimens tested and it is recommended that before selection of flooring or paving materials the effect of service conditions, including maintenance procedures and wear on their slip resistance be checked.

Reviewed By:
Avel Güled
Compliance and Test Technician

Reviewed By:
Marcus Braché
Senior Engineering Technician
Approved Signatory

This report may not be reproduced except in its entirety
ATTAR Advanced Technology Testing and Research
A division of Tennyson Road Engineering, a subsidiary of the Latham Group

Unit 1, 64 Bridge Rd, Keysborough VIC 3173, T 039 9674 6144 F 039 9674 6133 E admin@attar.com.au www.attar.com.au

Page 1 of 3

DYNAMIC LOAD TESTING – ENTRY MATS



Latham Dirt Control Roll-up Entry Mats and Mat Frames have undergone dynamic load testing. This involves placing a certain load onto a trolley and pushing the loaded trolley over the samples 20 times in dual-directions over the same location. This simulates the movement of pedestrian traffic and wheels of a travel bag or trolley back and forth through an entrance.

The deflection was then recorded, with test results in the table below. The test samples were found in satisfactory condition as there was no observable physical damage, with all dimensions remaining mainly unchanged. Full testing can be obtained by contacting Latham Australia.

	RDCC/SDCC		RDCV/SDCV		RSA/SSA	
Load (kN)	Deflection (mm)	Percentage Change (%)	Deflection (mm)	Percentage Change (%)	Deflection (mm)	Percentage Change (%)
0.5	0.28	1.64	0	0	0	0
1	0.31	1.85	0.15	0.95	0.02	0.14
1.5	0.39	2.34	0.24	1.59	0.08	0.55
2	0.46	2.94	0.23	1.55	0.153	1.08
2.5	0.58	3.76	0.36	2.45	0.21	1.5

