

All Latham Corner Guards are supplied in 3625mm lengths for site cutting to the required dimensions. The quantity of End Caps required for the CG-50 and CG-75 profiles should be calculated and ordered with the Corner Guard section.

It is common practice for floor-to-ceiling wall protection to be installed without end caps, whilst floor-to-specific-height and above-floor-to-specific-height are installed with 1 or 2 end caps.

Corner Guards

CG Series Surface Mounted

The Latham CG-50 and CG-75 Surface Mounted Corner Guards offer the best protection for 90° external corners. The high impact textured cover snugly fits over the continuous base section. The matching end caps mean the corner guards can be used in any lengths from project specific applications where very short corner guards are desired to full floor-to-ceiling corner guards.


The system should be considered for use in conjunction with HR and HBR Series Hand Rails, BR Series Bump Rails and WS Series Wall Sheeting.

End caps are available with the system.

Type CG-75 Detail



Type CG-50 Detail

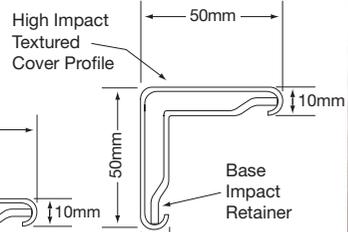

Type CG-50 EC End Cap
Type CG-75 EC End Cap

Type CG-50 with CG-50 End Cap shown in violet

The system is offered in 6 colours



Standard Specifications

Standard length is 3625mm. For fixing and installation details contact Latham Australia.

PCG & PCGF Adhesive Fixed

PCGF-60 Flexible Corner Guard

The Latham PCGF-60 Flexible Adhesive Fixed Surface Mounted Corner Guards are specifically designed to accommodate varying wall/corner angles from flat to more than 135°.

PCG-25 and PCG-50 Corner Guards

The Latham PCG-25 and PCG-50 Adhesive Fixed Surface Mounted Corner Guards offer protection for 90° external corners.


The corner guards can be used in any lengths from project specific applications where very short corner guards are desired to full floor-to-ceiling corner guards. The PCG Corner Guards are fixed with Latham's special field applied FT-13 high strength double-sided tape, or in some applications the PCG Corner Guards can be permanently fixed using Latham Thixotropic Epoxy Adhesive.

The system should be considered for use in conjunction with HR and HBR Series Hand Rails, BR Series Bump Rails and WS Series Wall Sheeting.

Standard Specifications


Standard length is 3625mm.

For fixing and installation details contact Latham Australia.

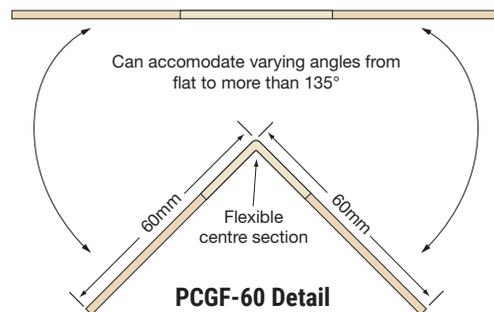

PCGF-60 Detail

Type PCGF-60 shown in almond beige

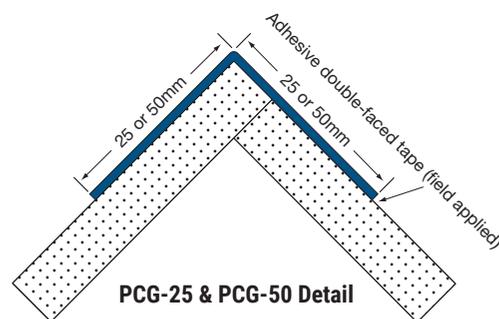

PCG-25 & PCG-50 Detail

The PCG system is offered in 6 colours



The PCGF system is offered in 3 colours



The functional Solution

Latham Hand Rails, Hand/Bump Rails, Illuminated Hand/Bump Rails, Bump Rails, Corner Guards, and Wall Protection Sheeting are designed to provide a simple aesthetically appealing, functional solution for locations where traffic movement may be expected to cause scuffing and damage to walls and corners.

Usage examples include hospitals, schools, restaurants, offices, nursing homes, shops, passenger check in areas, hotels etc.

The textured finish that is on all the sections (excluding the BR-25) provides a hard wearing, scuff & scratch resistant replaceable finish to compliment modern designs.



Luminance Reflective Value

Each of the 7 samples shown indicate the approximate colour and the Luminance Reflective Value (LRV) for the Latham Wall Protection Systems product range.



Snow White
LVR 82



Almond Beige
LVR 50



Hazy Grey
LVR 21



Violet
LVR 19



Sapphire Blue
LVR 7



Pine Green
LVR 7



Blue Grey
LVR 19