

USETM-50 Elastomeric Aluminium & Neoprene Floor Expansion Joint Cover



Features



Multidirectional
6-way Movement



Vehicular
Traffic




Indoor Use



Outdoor Use



Fire Rateable

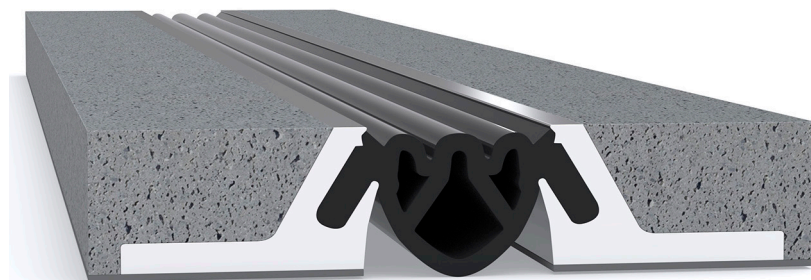

The USETM-50 Elastomeric floor expansion joint cover is designed for vehicular applications while also accommodating pedestrian traffic, and would normally be considered for carpark installations. The insert can be supplied in continuous lengths up to 50 metres without the requirement for a join, ensuring water tightness of the system.

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ One-way, non-removable neoprene seal.
- ➔ Aluminium extrusions supplied in 3050mm lengths.
- ➔ Neoprene can be supplied in lengths up to 50m to reduce on-site joining of the seal.


Fixings

- ➔ Side member pre-drilled 16mm holes at ~500mm centres.

TECHNICAL CHARACTERISTICS

Illustrated: USETM-50

Aluminium Code	A	B	C	D	E	Movement	Total Available Movement
USETM-50	50	38	50	66	13	+/-20mm	40mm

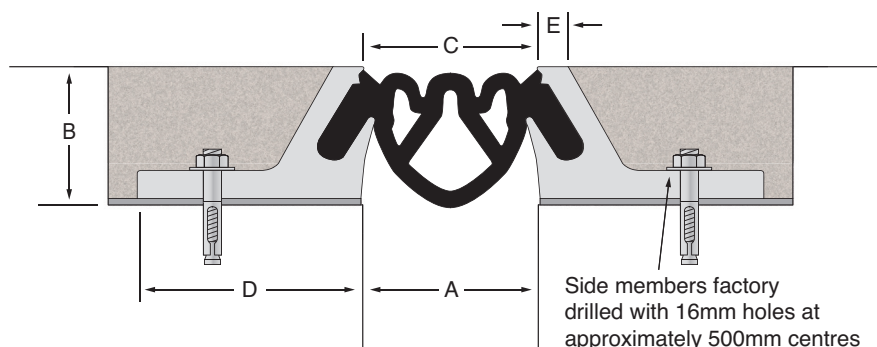

All dimensions in millimetres. All mechanical expansion joint fixings by others.



Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue