

USETM-50FW Elastomeric Aluminium & Neoprene Floor-to-Wall Expansion Joint Cover



Features



Multidirectional
6-way Movement



Vehicular
Traffic




Indoor Use



Outdoor Use



Fire Rateable

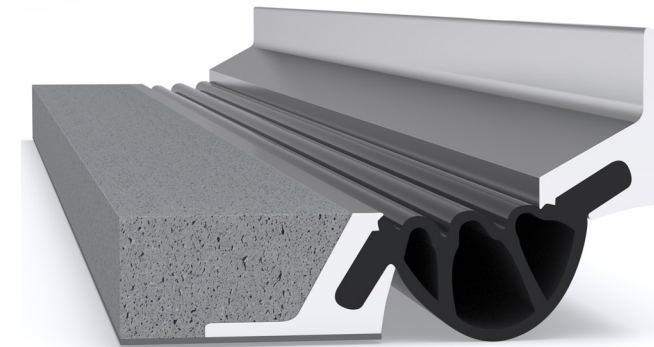

The USETM-50FW Elastomeric floor-to-wall expansion joint cover is designed to match the USETM-50 floor joint for floor-to-wall applications. The insert can be supplied in continuous lengths up to 50 metres without the requirement for a join, ensuring water tightness of the system.

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ One-way, non-removable neoprene seal.
- ➔ Aluminium extrusions supplied in 3050mm lengths
- ➔ Neoprene can be supplied in lengths up to 50m to reduce on-site joining of the seal.


Fixings

- ➔ Side member pre-drilled 16mm holes at ~500mm centres.

TECHNICAL CHARACTERISTICS

Illustrated: USETM-50FW

Aluminium Code	A	B	C	D	E	Movement	Total Available Movement
USETM-50FW	88	38	50	66	13	+/-20mm	40mm

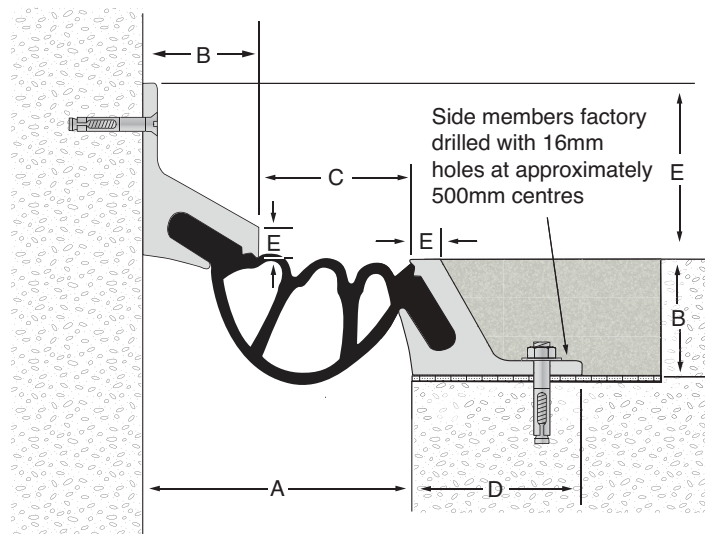

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Operating internationally for over 70 years, we have the knowledge, expertise, experience, and on ground presence to assist in your international market, no matter where your project is located.

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue