


DRCS-25 to DRCS-150**Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck****Features**

Multidirectional 6-way Movement



Water Gutter Available

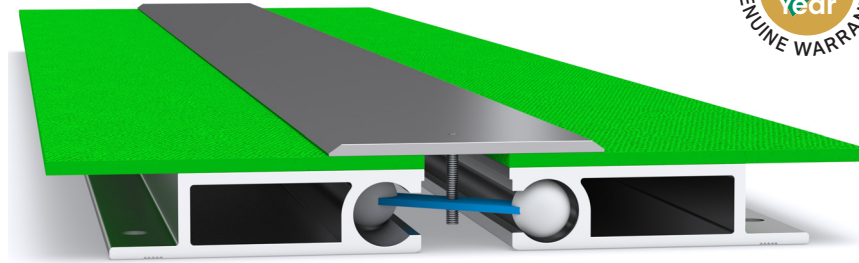

Indoor Use



Outdoor Use



Anti-Tamper Tie Bar Screws Available



Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available



Fire Rateable

The DRCS Carpet-Line (shallow) Series floor-to-floor expansion joint covers carry a stainless steel cover plate. The series is designed to be installed in carpet applications. These applications can incorporate direct-stick carpet or carpet with underlay, where the cover plate will hold down the carpet and underlay. This system would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DRCS-25


Stainless Steel Code Smooth Deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCS-25	25	155	75	93	+25/-15mm	40mm	24mm	3mm
DRCS-50	50	180	100	93	+/-25mm	50mm	24mm	3mm
DRCS-75	75	205	125	93	+/-25mm	50mm	24mm	3mm
DRCS-100	100	230	150	93	+/-25mm	50mm	24mm	3mm
DRCS-150	150	280	200	93	+/-25mm	50mm	25mm	4mm

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ 304 Grade 2B finish stainless steel cover plate.
- ➔ Supplied in 3050mm lengths.
- ➔ Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- ➔ Side members factory drilled with 10mm holes at ~475mm centres.

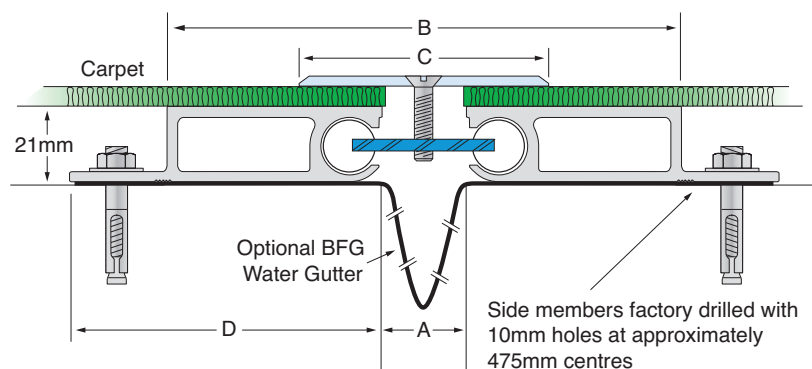

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue