

DRCB-25 to DRCB-150

Floor-to-Floor Expansion Joint Cover with Brass Deck



Features



Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use




Anti-Tamper Tie Bar Screws Available



Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available



Fire Rateable

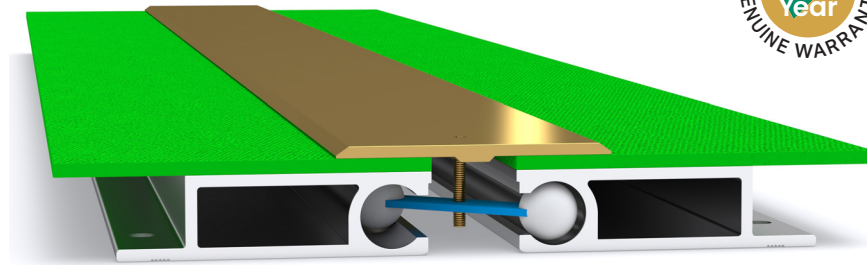

The DRCB Carpet-Line (shallow) Series floor-to-floor expansion joint covers carry a solid brass cover plate. The series is designed to be installed in carpet applications. These applications can incorporate direct-stick carpet or carpet with underlay, where the cover plate will hold down the carpet and underlay. This system would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DRCB-25


Brass Code Smooth Deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCB-25	25	155	75	93	+25/-15mm	40mm	24mm	3mm
DRCB-50	50	180	100	93	+/-25mm	50mm	24mm	3mm
DRCB-75	75	205	125	93	+/-25mm	50mm	24mm	3mm
DRCB-100	100	230	150	93	+/-25mm	50mm	24mm	3mm
DRCB-150	150	280	200	93	+/-25mm	50mm	26 mm	5mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Side members supplied in 3050mm lengths.
- Brass cover plate supplied in 4000mm lengths.
- 3mm brass cover plates wider than 100mm supplied in 1800mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Side members factory drilled with 10mm holes at ~475mm centres.

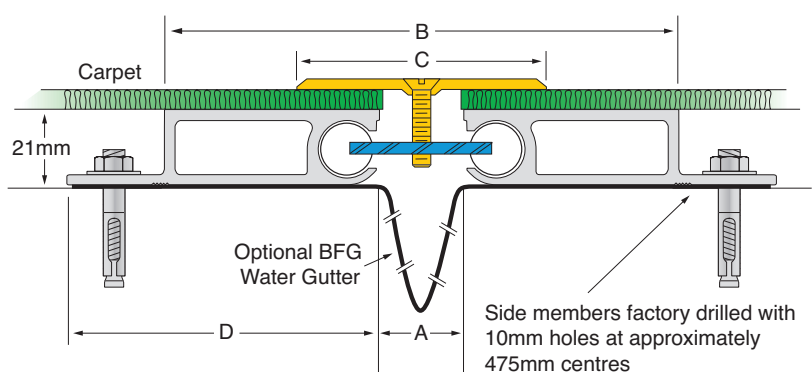

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue