

DRCA-25 to DRCA-150 Aluminium Floor-to-Floor Expansion Joint Cover with Ribbed Deck



Features



Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use




Anti-Tamper Tie Bar Screws Available



Slip Resistant Sumo Grip (P4) Coating Available



Fire Rateable

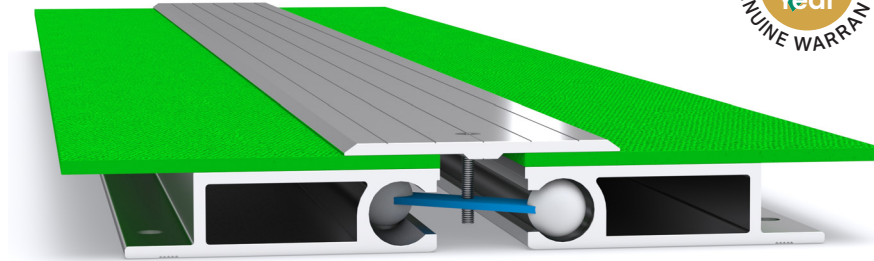

The DRCA Carpet-Line (shallow) Series floor-to-floor expansion joint covers are designed to be installed in carpet applications. These applications can incorporate direct-stick carpet or carpet with underlay, where the cover plate will hold down the carpet and underlay. This system would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DRCA-25

Aluminium Code Ribbed Deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCA-25	25	155	75	93	+25/-15mm	40mm	24mm	3mm
DRCA-50	50	180	100	93	+/-25mm	50mm	24mm	3mm
DRCA-75	75	205	125	93	+/-25mm	50mm	24mm	4mm
DRCA-100	100	230	150	93	+/-25mm	50mm	24mm	5mm
DRCA-150 •	150	280	200	93	+/-25mm	50mm	25mm	5mm


• Denotes smooth deck

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Side members factory drilled with 10mm holes at ~475mm centres.

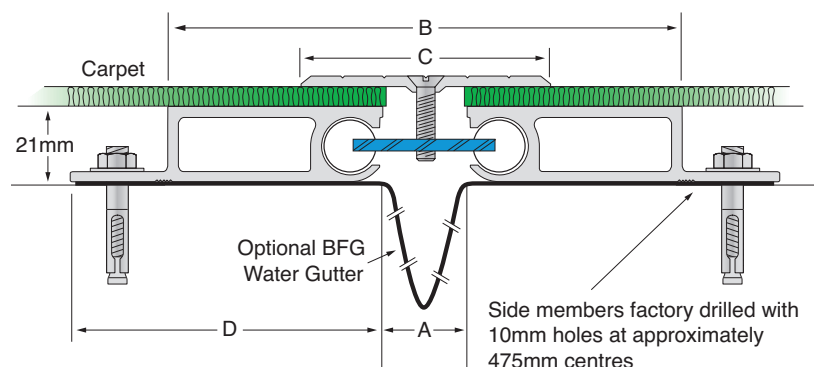

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue

+61 2 9879 7888

joints@latham-australia.com

Designs and specifications subject to change without notice.



LATHAM
www.latham-australia.com