


DRCBL-25 to DRCBL-150

Floor-to-Wall Expansion Joint Cover with Brass Deck



Features

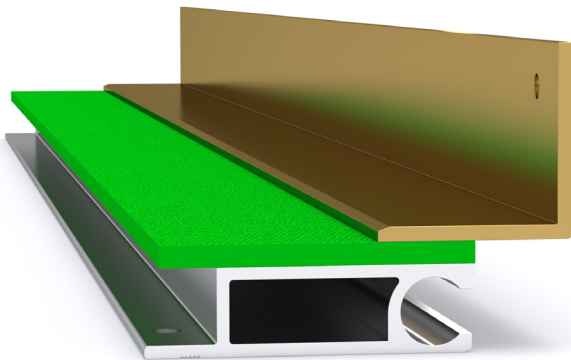

Multidirectional
4-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available

The DRCBL Carpet-Line (shallow) Series floor-to-wall expansion joint covers carry a solid brass cover plate and wall member. The series is designed to be installed in carpet applications. These applications can incorporate direct-stick carpet or carpet with underlay, where the cover plate will hold down the carpet and underlay. This system would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DRCBL-25


Soid Brass Code Smooth Deck	A	B	C	D	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DRCBL-25	25	90	50	93	+/-12mm	25mm	61mm	3mm
DRCBL-50	50	115	75	93	+/-12mm	25mm	61mm	3mm
DRCBL-75	75	140	100	93	+/-12mm	25mm	61mm	3mm
DRCBL-100	100	165	125	93	+/-12mm	25mm	61mm	3mm
DRCBL-150	150	215	175	93	+/-12mm	25mm	61mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy cover plate.
- Side members supplied in 3050mm lengths. Brass cover plate supplied in 1800mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept countersunk head 6.5mm fixings at ~475mm centres.

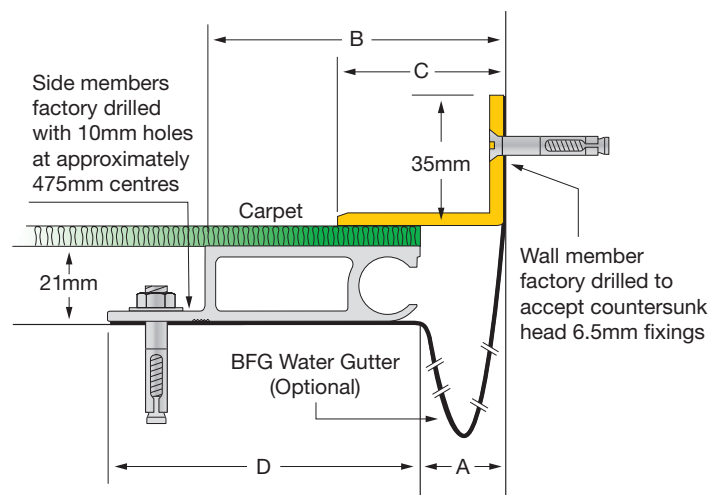

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue