


NBDSL-30 to NBDSL-155 No Bump Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck



Features

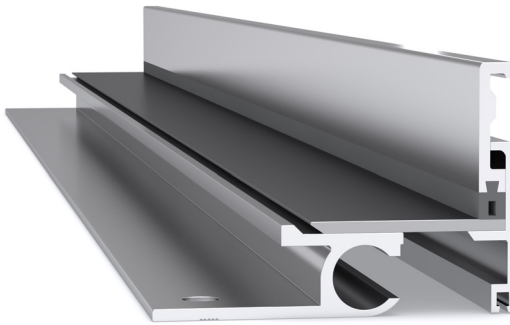

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available

The NBDSL Series no-bump, recessed floor-to-wall expansion joint covers are designed for applications where a very smooth transition is demanded such as acute hospital wards. They are a robust system that carries a stainless steel cover plate and typically are installed with timber, tile, vinyl and direct-stick carpet applications.

TECHNICAL CHARACTERISTICS

Illustrated: NBDSL-30


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NBDSL-30	30	60	51	9	3	68	+22/-3mm	25mm	67mm	3mm
NBDSL-53	53	86	77	9	3	68	+22/-3mm	25mm	67mm	3mm
NBDSL-80	80	109	100	9	3	68	+22/-3mm	25mm	67mm	3mm
NBDSL-105	105	134	125	9	3	68	+22/-3mm	25mm	67mm	3mm
NBDSL-155	155	184	175	9	3	68	+22/-3mm	25mm	67mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plate.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

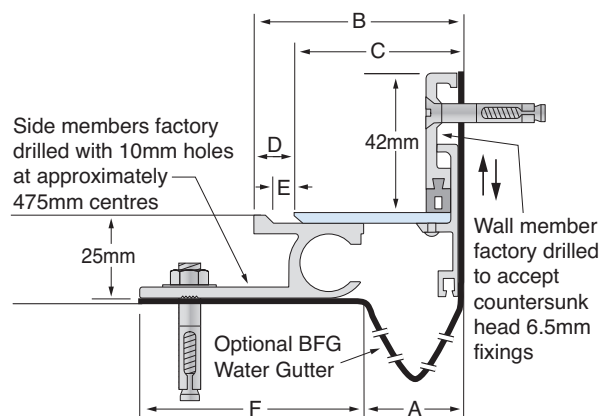

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue