


NBFXSL-30 to NBFXSL-105 No Bump Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck



Features

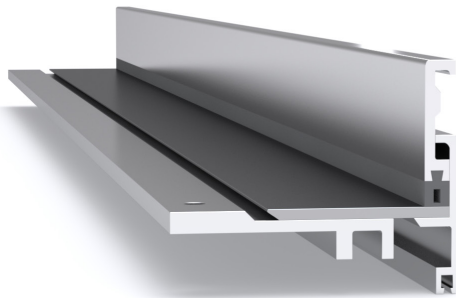

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available

The NBFXSL Series no-bump, floor-to-wall expansion joint covers are designed for applications where a very smooth transition is demanded such as acute hospital wards. The surface mounted design means it can be installed without a recess or topping and can be installed directly in the joint without the need for cutouts when the joint width is 57mm or wider. They are a robust system that carries a stainless steel cover plate and typically are installed with timber, tile, vinyl and direct-stick carpet applications.

TECHNICAL CHARACTERISTICS

Illustrated: NBFXSL-30


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NBFXSL-30	30	92	67	46	20	5	+25/-5mm	30mm	Surface Mounted	3mm
NBFXSL-55	55	130	90	46	20	5	+25/-5mm	30mm	Surface Mounted	3mm
NBFXSL-105	105	180	115	46	20	5	+25/-5mm	30mm	Surface Mounted	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plate.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with cylindrical pins at ~475mm centres to facilitate multidirectional movement.

Fixings

- Side member and wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.
- We recommend Latham Thixotropic Epoxy Adhesive be used in conjunction for superior securing.

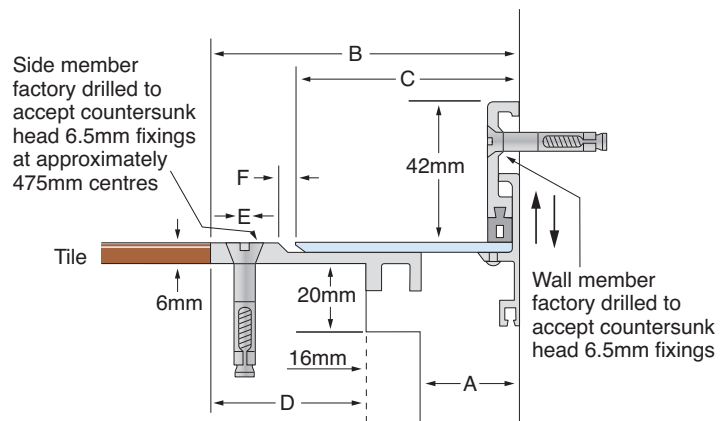

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue