


NBBL-55 to NBBL-130 Brass No Bump Floor-to-Wall Expansion Joint Cover



Features

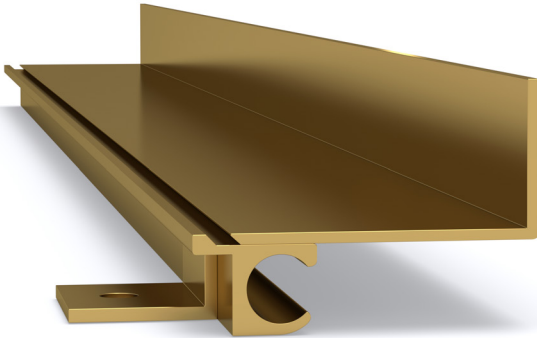

Multidirectional
6-way Movement



Indoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available



Factory
Curvable

The NBBL Series no bump, solid brass, floor-to-wall expansion joint covers are designed for applications where a very smooth transition is demanded such as acute hospital wards. They are a robust system and typically are installed with timber, tile, vinyl and direct-stick carpet applications.

TECHNICAL CHARACTERISTICS

Illustrated: NBBL-30


Brass Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NBBL-55	55	86	78	8	3	66	+22/-3mm	25mm	60mm	3mm
NBBL-80	80	111	103	8	3	66	+22/-3mm	25mm	60mm	3mm
NBBL-105	105	136	128	8	3	66	+22/-3mm	25mm	60mm	3mm
NBBL-130	130	161	153	8	3	66	+22/-3mm	25mm	60mm	5mm

Materials

- Brass 380 mill finish alloy.
- Supplied in 4000mm lengths.
- Cover plates wider than 100mm will be supplied in 1800mm lengths.

Fixings

- BM-16 Block-Out Anchors are supplied factory drilled with 10mm holes. They are supplied welded to the side members at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.
- On request: BS-6 Cast-In Anchors can be supplied for cast-in applications and will be welded at ~475mm centres.

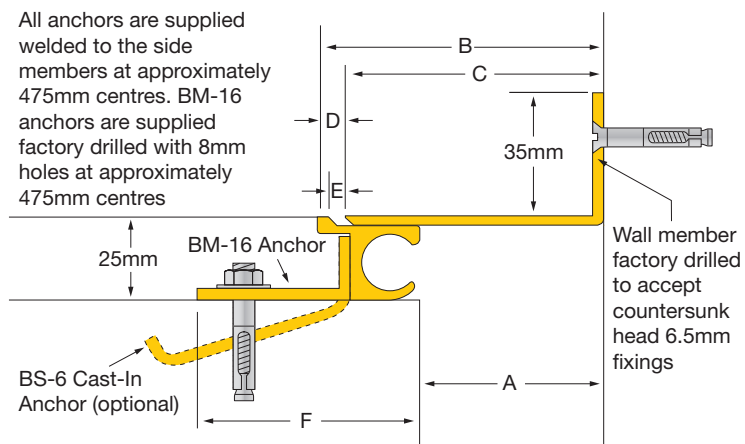

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue