


HHS-25 to HHS-200

Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck



Features

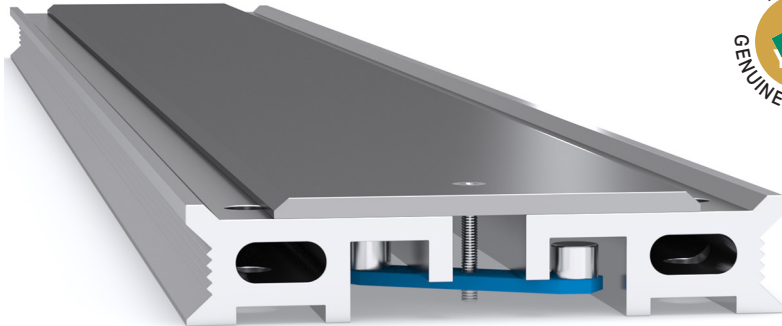

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Anti-Tamper
Tie Bar Screws
Available



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available



Fire Rateable

The HHS Series Heavy-Duty Pedestrian expansion joint covers with stainless steel cover plates are designed for heavy-duty pedestrian applications. They can accept heavier traffic (subject to the load and the span) such as EWPs. For more load information contact Latham Australia who can supply point loads to suit various traffic loads and wheel sizes. For regular vehicular traffic, the HDS or EHDF Series should be considered.

TECHNICAL CHARACTERISTICS

Illustrated: HHS-25


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
HHS-25	25	125	90	18	12	50	+25/-12mm	37mm	25mm	5mm
HHS-50	50	150	115	18	12	50	+/-25mm	50mm	25mm	5mm
HHS-75	75	175	140	18	12	50	+/-25mm	50mm	25mm	5mm
HHS-100	100	200	165	18	12	50	+/-25mm	50mm	26mm	6mm
HHS-150	150	250	215	18	12	50	+/-25mm	50mm	26mm	6mm
HHS-200	200	300	265	18	12	50	+/-25mm	50mm	27mm	7mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates to 6mm thickness, and #1 finish for cover plates thicker than 6mm.
- Spring steel treated centring bar with cylindrical pins at ~475mm centres.
- Supplied in 3050mm lengths.

Fixings

- Side members factory drilled to accept 8mm countersunk head fixings at ~350mm centres.

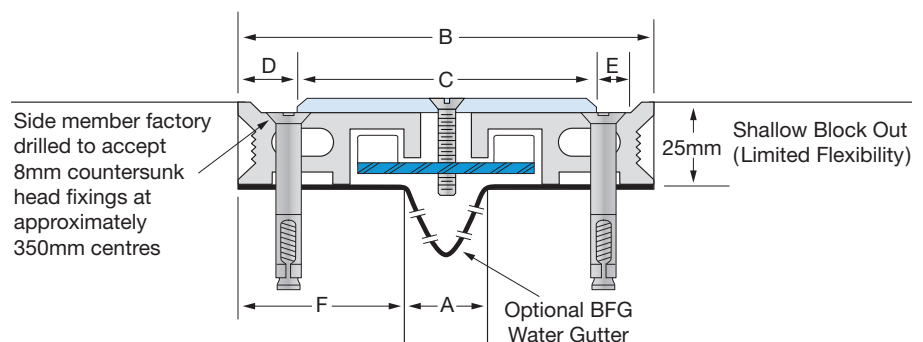

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue