



**GOOD
DESIGN
AWARD®
WINNER**



Features



Multidirectional
4-way Movement



Indoor Use



Application

- Floor, Floor-to-Wall, Wall & Ceiling expansion joint covers.
- Internal light duty, moderate traffic applications only, where limited movement is expected.
- The Brass Clad 50-Series joint covers allow a maximum of $\pm 5\text{mm}$ of horizontal movement.

Materials

- Brass Clad Aluminium 6063-T5 mill finish alloy.
- Supplied in 3600mm lengths.
- Standard replaceable synthetic rubber inserts are beige. Grey or black can be supplied on request.

Fixings

- Brass clad side members factory drilled with 10mm holes at $\sim 475\text{mm}$ centres.
- Brass anodised wall members factory drilled to accept 8mm gauge screw and plug at $\sim 475\text{mm}$ centres on request.

FOR FURTHER TECHNICAL
SPECIFICATIONS VISIT
WWW.LATHAM-AUSTRALIA.COM

INSERT COLOUR SELECTION



Grey




Black



Beige


B50-FDR & B50-FDRW Brass Clad Floor & Floor-to-Wall Expansion Joint Covers

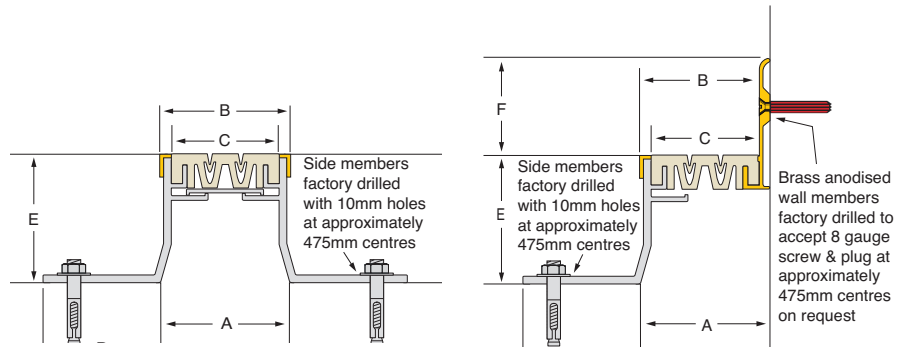

TECHNICAL CHARACTERISTICS

Brass Clad Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
B50-FDR	50	48	42	50	51	n/a	$\pm 5\text{mm}$	10mm	50mm
B50-FDRW	50	45	42	50	51	38	$\pm 5\text{mm}$	10mm	88mm


B50-FDR (30) & B50-FDRW (30) Brass Clad Floor & Floor-to-Wall Expansion Joint Covers

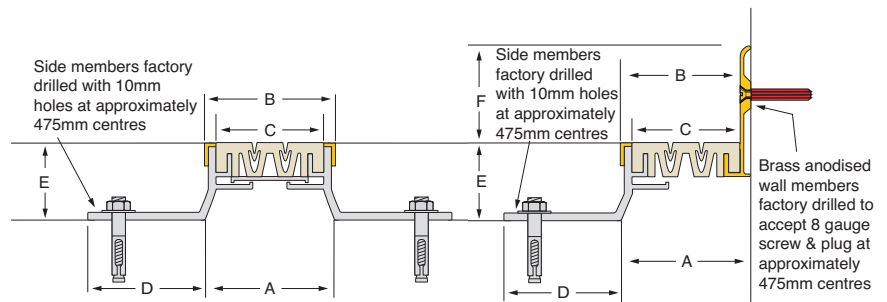

TECHNICAL CHARACTERISTICS

Brass Clad Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
B50-FDR (30)	50	48	42	50	31	n/a	$\pm 5\text{mm}$	10mm	30mm
B50-FDRW (30)	50	46	42	50	31	38	$\pm 5\text{mm}$	10mm	69mm

B50-FDR (20) & B50-FDRW (20) Brass Clad Floor & Floor-to-Wall Expansion Joint Covers

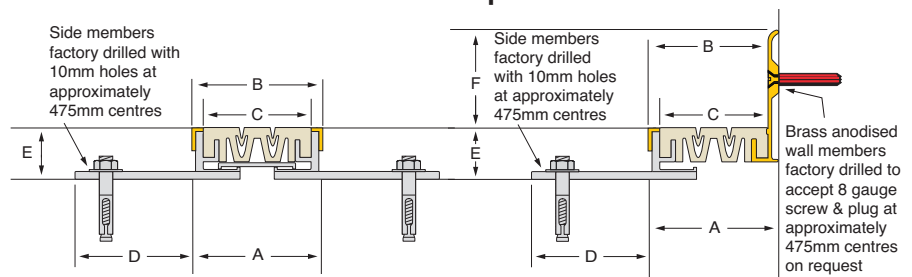

TECHNICAL CHARACTERISTICS

Brass Clad Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
B50-FDR (20)	50	48	42	50	21	n/a	$\pm 5\text{mm}$	10mm	20mm
B50-FDRW (20)	50	46	42	50	21	38	$\pm 5\text{mm}$	10mm	59mm