



**GOOD
DESIGN
AWARD®
WINNER**



Features



Multidirectional
4-way Movement



Indoor Use



Application

- Surface mounted expansion joint covers should be laid on a bedding compound such as Latham Tytred 2, or glued down with Latham Titazel Thixotropic Epoxy Resin Adhesive, both in conjunction with stainless steel screws and plastic plugs or mechanical fixings.
- Internal light duty, moderate traffic applications only, where limited movement is expected.
- The 50-Series joint covers allow a maximum of $\pm 5\text{mm}$ of horizontal movement.
- The 50-Series offers the opportunity to use the most similar joint cover in the wall and ceiling to the floor. This is particularly effective when the construction joint forms a square box shape. See FDR and FDRW Series

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 4000mm lengths.
- Standard replaceable synthetic rubber inserts are grey (beige or black can be supplied on request).

Fixings

- Side members factory drilling available on request.
- Wall members factory drilling available on request.

INSERT COLOUR SELECTION



Grey





Black





Beige



50-FTSR & 50-FTWSR Aluminium Floor & Floor-to-Wall Expansion Joint Covers

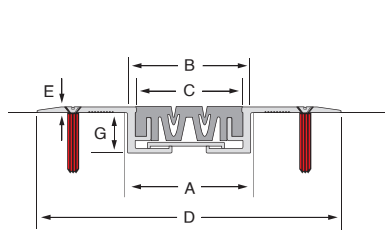

50-FCSR & 50-FCWSR (Carpet) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

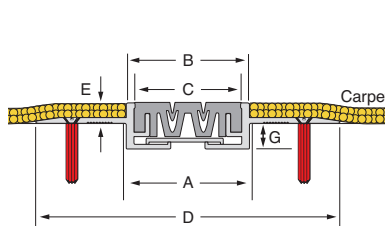

50-FTVR & 50-FTWVR (Vinyl) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

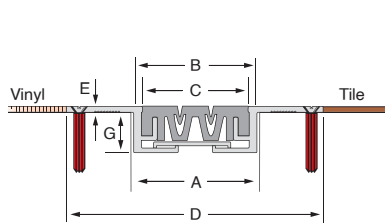



TECHNICAL CHARACTERISTICS

Factory drilling available on request

Aluminium Code	A	B	C	D	E	F	G	Movement	Total Available Movement	Overall Depth
50-FTSR	50	48	42	124	3	n/a	20	+/-5mm	10mm	19mm
50-FTWSR	50	45	42	90	3	38	20	+/-5mm	10mm	57mm
50-FCSR	50	48	42	124	8	n/a	10	+/-5mm	10mm	18mm
50-FCWSR	50	45	42	90	8	38	10	+/-5mm	10mm	54mm
50-FTVR	50	48	42	102	3	n/a	20	+/-5mm	10mm	19mm
50-FTWVR	70	45	42	92	3	38	20	+/-5mm	10mm	52mm

Type 50-WR & Type 50-WCR Aluminium Wall & Ceiling Expansion Joint Covers

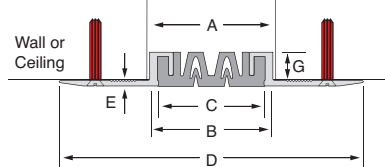

TECHNICAL CHARACTERISTICS

Factory drilling available on request

Aluminium Code	A	B	C	D	E	F	G	Movement	Total Available Movement	Overall Depth
50-WR	50	48	42	115	3	n/a	20	+/-5mm	10mm	23mm
50-WCR	50	45	42	85	3	38	20	+/-5mm	10mm	41mm