



**GOOD
DESIGN
AWARD®
WINNER**



Features



Multidirectional
4-way Movement



Indoor Use



Application

- Floor, Floor-to-Wall, Wall & Ceiling expansion joint covers.
- Internal light duty, moderate traffic applications only, where limited movement is expected.
- The 70-Series joint covers allow a maximum of $\pm 10\text{mm}$ of horizontal movement.
- The 70-Series offers the opportunity to use the most similar joint cover in the wall and ceiling to the floor. This is particularly effective when the construction joint forms a square box shape. See WCR and WCR Series.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 4000mm lengths.
- Standard replaceable synthetic rubber inserts are grey. Beige or black can be supplied on request.

Fixings

- Side members factory drilled with 10mm holes at $\sim 475\text{mm}$ centres.
- Wall members factory drilled to accept 8mm gauge screw and plug at $\sim 475\text{mm}$ centres on request.

FOR FURTHER TECHNICAL
SPECIFICATIONS VISIT
WWW.LATHAM-AUSTRALIA.COM

INSERT COLOUR SELECTION



Grey




Black



Beige


70-FDR & 70-FDRW Aluminium Floor & Floor-to-Wall Expansion Joint Covers

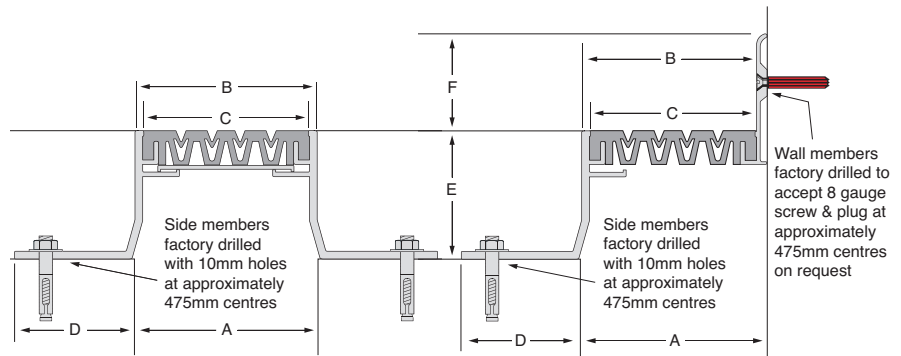

TECHNICAL CHARACTERISTICS

Aluminium Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
70-FDR	70	71	65	50	50	n/a	$\pm 10\text{mm}$	20mm	50mm
70-FDRW	70	68	65	50	50	38	$\pm 10\text{mm}$	20mm	88mm


70-FDR(30) & 70-FDRW(30) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

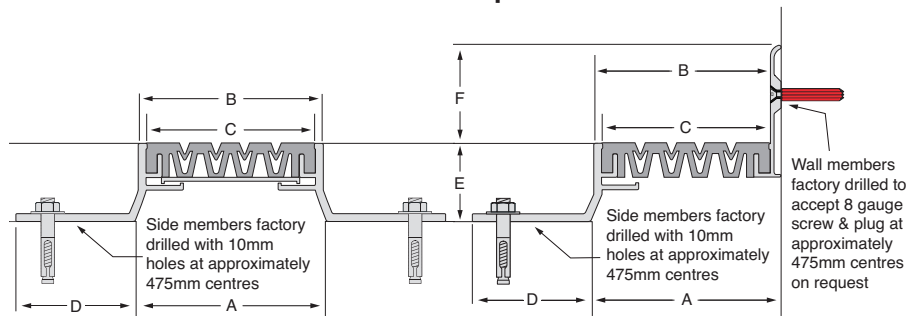

TECHNICAL CHARACTERISTICS

Aluminium Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
70-FDR(30)	70	71	65	50	30	n/a	$\pm 10\text{mm}$	20mm	30mm
70-FDRW(30)	70	68	65	50	30	38	$\pm 10\text{mm}$	20mm	68mm

70-FDR(20) & 70-FDRW(20) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

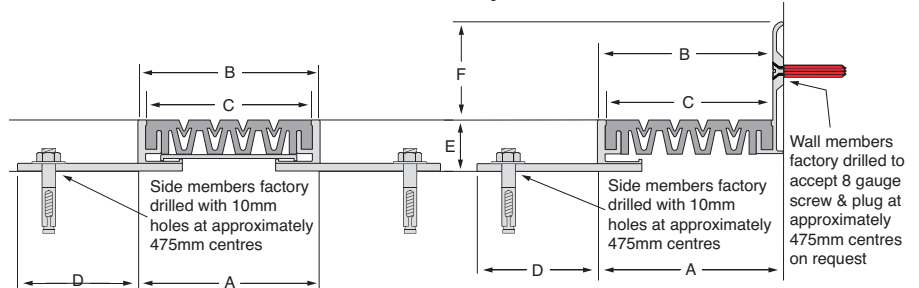

TECHNICAL CHARACTERISTICS

Aluminium Code	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth
70-FDR(20)	70	71	65	50	20	n/a	$\pm 10\text{mm}$	20mm	20mm
70-FDRW(20)	70	68	65	50	20	38	$\pm 10\text{mm}$	20mm	58mm