



**GOOD
DESIGN
AWARD®
WINNER**



Features



Multidirectional
4-way Movement



Indoor Use



Application

- Surface mounted expansion joint covers should be laid on a bedding compound such as Latham Tytred 2, or glued down with Latham Titazel Thixotropic Epoxy Resin Adhesive, both in conjunction with stainless steel screws and plastic plugs or mechanical fixings.
- Internal light duty, moderate traffic applications only, where limited movement is expected.
- The 70-Series joint covers allow a maximum of $\pm 10\text{mm}$ of horizontal movement.
- The 70-Series offers the opportunity to use the most similar joint cover in the wall and ceiling to the floor. This is particularly effective when the construction joint forms a square box shape. See FDR and FDRW Series.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 4000mm lengths.
- Standard replaceable synthetic rubber inserts are grey (beige or black can be supplied on request).

Fixings

- Side members factory drilling available on request.
- Wall members factory drilling available on request.

INSERT COLOUR SELECTION



Grey




Black




Beige


70-FTSR & 70-FTWSR Aluminium Floor & Floor-to-Wall Expansion Joint Covers

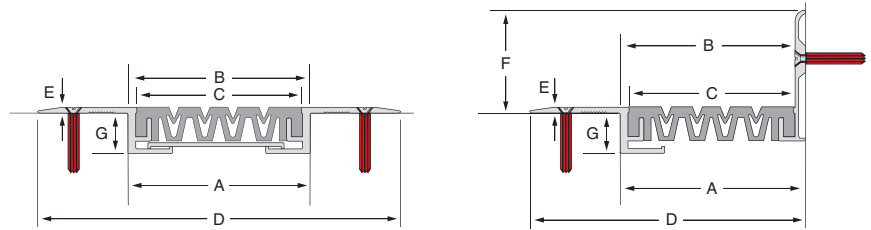

70-FCSR & 70-FCWSR (Carpet) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

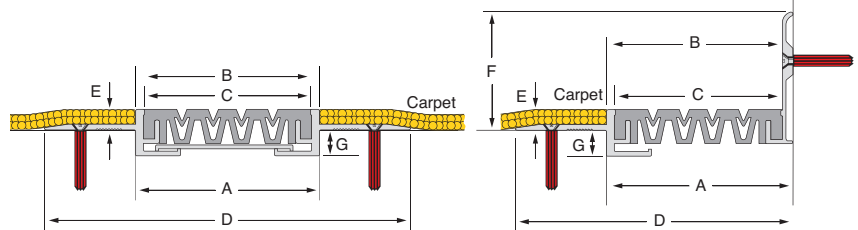

70-FTVR & 70-FTWVR (Vinyl) Aluminium Floor & Floor-to-Wall Expansion Joint Covers

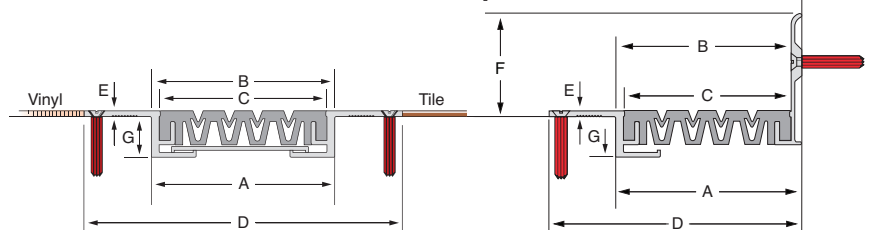


TECHNICAL CHARACTERISTICS

Factory drilling available on request

Aluminium Code	A	B	C	D	E	F	G	Movement	Total Available Movement	Overall Depth
70-FTSR	70	71	65	141	3	n/a	16	$\pm 10\text{mm}$	20mm	19mm
70-FTWSR	70	68	65	106	3	36	16	$\pm 10\text{mm}$	20mm	57mm
70-FCSR	70	71	65	141	8	n/a	10	$\pm 10\text{mm}$	20mm	18mm
70-FCWSR	70	71	65	106	8	36	10	$\pm 10\text{mm}$	20mm	54mm
70-FTVR	70	71	65	119	3	n/a	16	$\pm 10\text{mm}$	20mm	19mm
70-FTWVR	70	68	65	95	3	36	16	$\pm 10\text{mm}$	20mm	52mm

Type 70-WR & Type 70-WCR Aluminium Wall & Ceiling Expansion Joint Covers

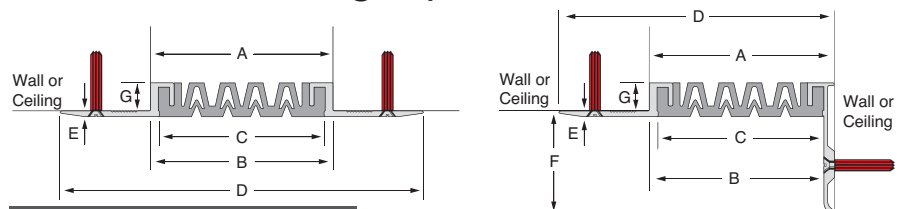

TECHNICAL CHARACTERISTICS

Factory drilling available on request

Aluminium Code	A	B	C	D	E	F	G	Movement	Total Available Movement	Overall Depth
70-WR	71	71	65	140	3	n/a	16	$\pm 10\text{mm}$	20mm	19mm
70-WCR	71	68	65	105	3	38	16	$\pm 10\text{mm}$	20mm	47mm