

BSMPL-25 to BSMPL-100

Brass/Aluminium Floor-to-Wall Expansion Joint Cover



Features



Multidirectional
4-way Movement



Water Gutter
Available




Indoor Use



Outdoor Use



Fire Rateable

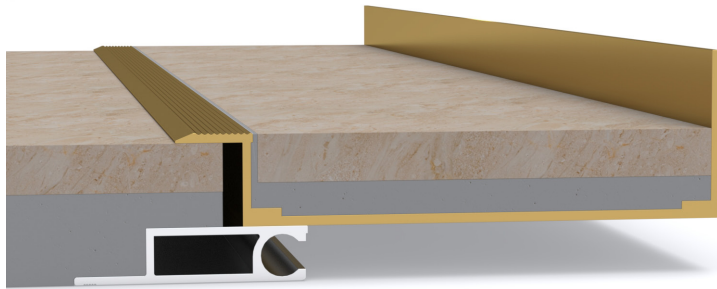

BSMPL Series PAVA-Inlay floor-to-wall expansion joint covers with solid brass cover plate are designed to accommodate a tile inlay up to 30mm deep which allows the joint surface to match the surrounding floor. The tapered edge of the cover plate is flush with the surface of the floor and controls the movement in the structure. The serrated top flange of the joint provides additional slip resistance.

TECHNICAL CHARACTERISTICS

Illustrated: BSMPL-100


Solid Brass Code	A	B	C	D	E	F	G	H	I	Movement	Total Available Movement	Cover Thickness
BSMPL-25	25	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm
BSMPL-50	50	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm
BSMPL-75	75	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm
BSMPL-100	100	231	200	31	12	22	41	37	93	+/-12mm	24mm	4mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Brass 380 mill finish alloy.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.
- The tile must be fixed with a suitable bedding agent.

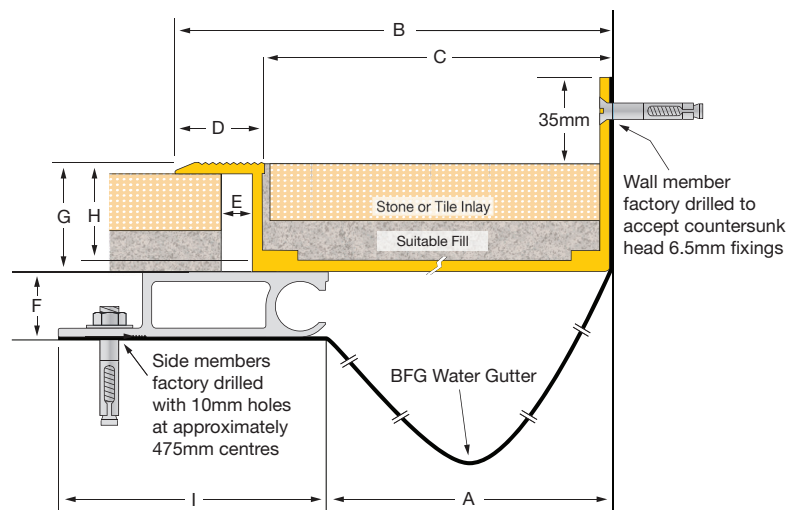

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue