

SGAL-50(TM) to SGAL-200(TM) Aluminium Floor-to-Floor Expansion Joint Cover (Thermal Movement)



Features



Multidirectional 6-way Movement



Water Gutter Available




Indoor Use



Outdoor Use



Fire Rateable

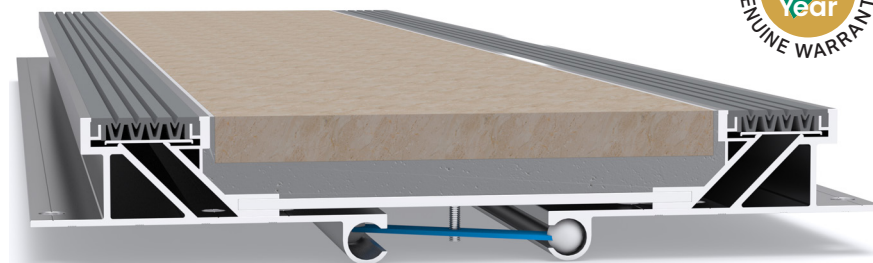

SGAL(TM) Series PAVA-Inlay floor-to-floor expansion joint covers are designed to accommodate a tile inlay up to 50mm deep which allows the joint surface to match the surrounding floor. Designed to be aesthetically pleasing with limited visible metal. Movement is accommodated by the Santoprene inserts on either side of the cover plate, available in Grey (standard) Buff and Black colours.


TECHNICAL CHARACTERISTICS				Illustrated: SGAL-100 (TM)							
Aluminium Code	A	B	C	D	E	F	G	H	I	Movement	Total Available Movement
SGAL-50 (TM)	50	418	77	65	65	50	28	185	30	+/-20mm	40mm
SGAL-75 (TM)	75	443	77	65	65	50	28	185	30	+/-20mm	40mm
SGAL-100 (TM)	100	468	77	65	65	50	28	185	30	+/-20mm	40mm
SGAL-150 (TM)	150	518	77	65	65	50	28	185	30	+/-20mm	40mm
SGAL-200 (TM)	200	568	77	65	65	50	28	185	30	+/-20mm	40mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Standard grey santoprene inserts, buff and black available on request.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.
- Supplied in 2400mm lengths.

Fixings

- Side members factory drilled to accept 8mm countersunk head fixings at ~400mm centres.
- The tile must be fixed with a suitable bedding agent.

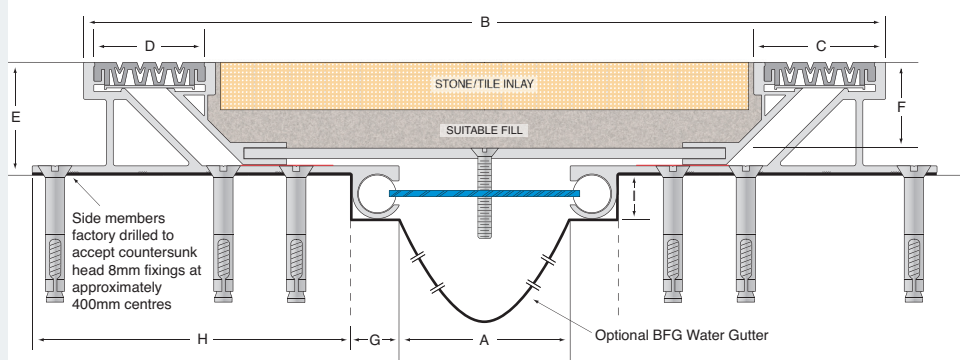

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue