

SGALL-50(TM) to SGALL-200(TM) Aluminium Floor-to-Wall Expansion Joint Cover (Thermal Movement)



Features



Multidirectional 4-way Movement



Water Gutter Available




Indoor Use



Outdoor Use



Fire Rateable

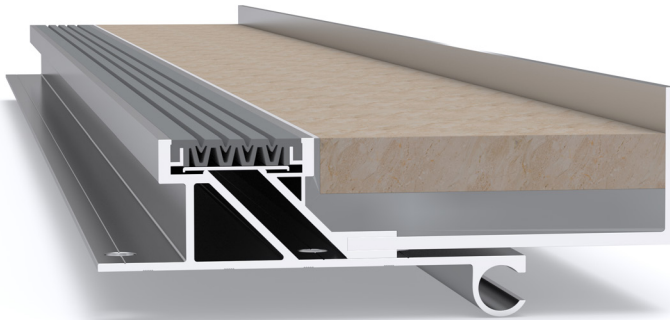

SGALL(TM) Series PAVAIinlay floor-to-wall expansion joint covers are designed to accommodate a tile inlay up to 50mm deep which allows the joint surface to match the surrounding floor. Designed to be aesthetically pleasing with limited visible metal. Movement is accommodated by the Santoprene inserts on either side of the cover plate, available in Grey (standard) Buff and Black colours


TECHNICAL CHARACTERISTICS				Illustrated: SGALL-50 (TM)							
Aluminium Code	A	B	C	D	E	F	G	H	I	Movement	Total Available Movement
SGALL-50 (TM)	50	234	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-75 (TM)	75	259	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-100 (TM)	100	284	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-150 (TM)	150	334	77	65	65	50	28	185	30	+/-10mm	20mm
SGALL-200 (TM)	200	384	77	65	65	50	28	185	30	+/-10mm	20mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Standard grey santoprene inserts, buff and black available on request.
- Supplied in 2400mm lengths.

Fixings

- Side member factory drilled to accept 8mm countersunk head fixings at ~400mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.
- The tile must be fixed with a suitable bedding agent.

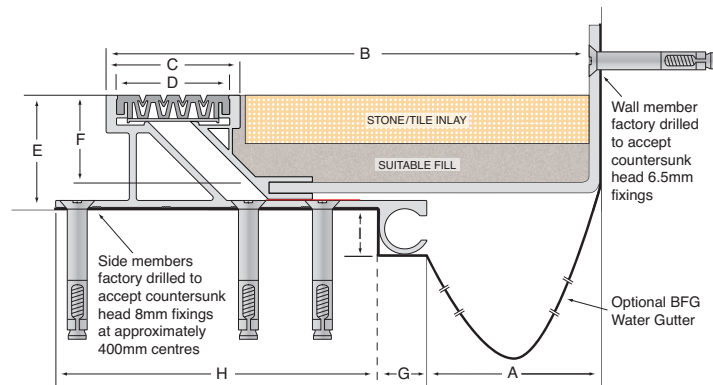

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue