


MSM-100 to MSM-600 Aluminium Wall & Ceiling Expansion Joint Covers

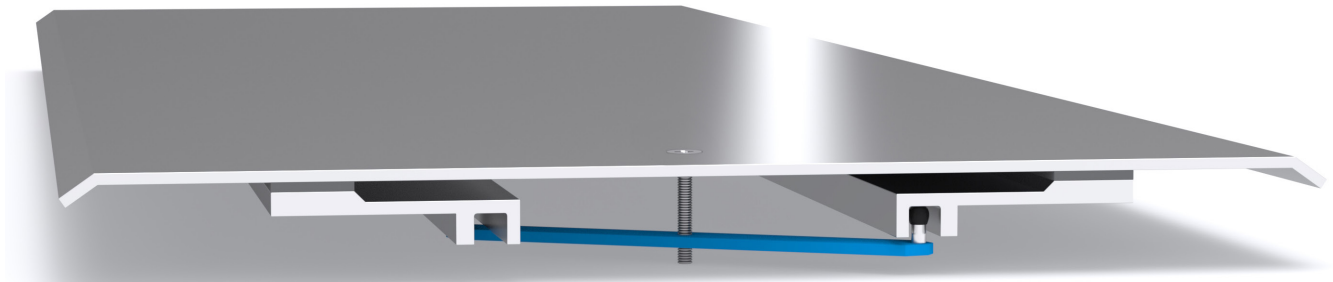

The **MSM Seismic Series wall and ceiling expansion joint covers** are designed for installation in walls and ceilings. The series is designed to accommodate normal thermal movement of the day-to-day requirements of the structure while accommodating extreme multidirectional movement during seismic events. As standard the system is supplied in mill finish aluminium. On request, Latham can have the cover plates anodised or powder coated to aesthetically harmonize with the installed location or the cover plate can be painted once it is installed on site.


TECHNICAL CHARACTERISTICS				Illustrated: MSM-100			Features
Aluminium Code	A	B	C	Movement	Total Available Movement	Overall Depth	
MSM-100	100	337	48	+100/-92mm	192mm	28mm	Multidirectional 6-way Movement
MSM-150	150	437	48	+150/-142mm	292mm	28mm	
MSM-200	200	537	48	+200/-190mm	392mm	28mm	Indoor Use
MSM-250	250	637	48	+250/-242mm	492mm	28mm	
MSM-300	300	737	48	+300/-292mm	592mm	28mm	Outdoor Use
MSM-400	400	937	48	+400/-392mm	792mm	28mm	
MSM-500	500	1137	48	+500/-492mm	992mm	28mm	Seismic Movement
MSM-600	600	1337	48	+600/-592mm	1192mm	28mm	
							Water Gutter Available Fire Rateable Anti-Tamper Screws Available

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ Contact a Latham representative for anodising/ powder coating options.
- ➔ Spring steel treated centring bar with cylindrical pins at ~475mm centres.
- ➔ Supplied in 3050mm lengths.

Fixings

- ➔ Side members factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

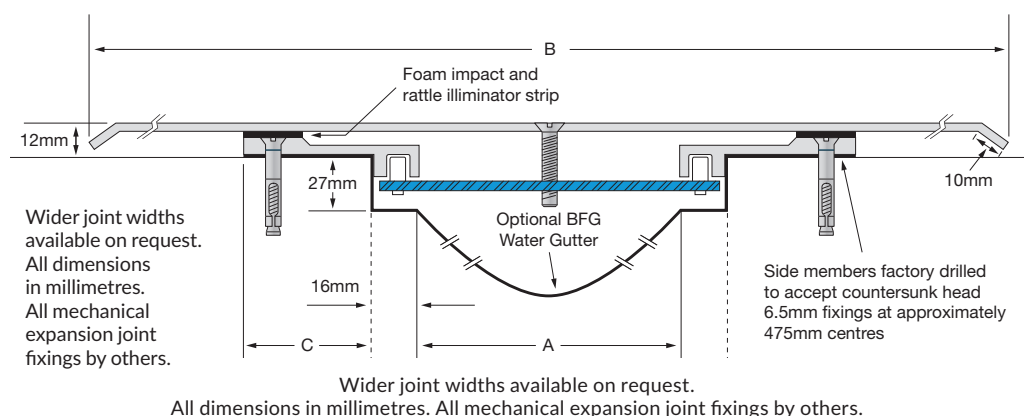

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue