



**GOOD
DESIGN
AWARD®
WINNER**

Features



Multidirectional
2-way Movement



Indoor Use



Slip Resistant
Sumo Grip (P4)
Coating Available



Materials

- Aluminium 6063-T5 mill finish alloy.
- The G-25A is supplied with 2 x 25mm wide resurfacing slip resistant inserts installed.
- Standard slip resistant insert colour is black (other colours are available on request).
- Supplied in 3050mm lengths.


Fixings

- The cover plates should be rigidly fixed to one side of the expansion joint as detailed.
- Optional factory drilling and fixings are available on request.


G-25 & G-25A (Abrasive Insert) Aluminium Surface Mounted Floor Expansion Joint Cover

The G-25 Series

Considered a gymnasium expansion joint cover for timber floors. Although surface mounted, it also accommodates vertical movement in the flooring caused by team sport, exercise classes or similar.

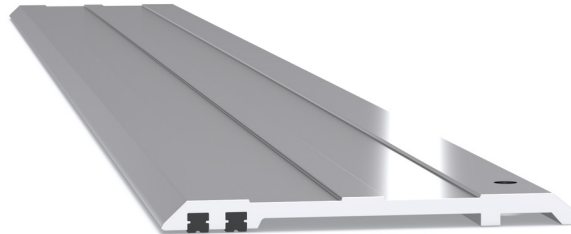


TECHNICAL CHARACTERISTICS				Illustrated: G-25	
Aluminium Code	A	B	Movement	Total Available Movement	Overall Depth
G-25	25	110	+/-25mm	50mm	Surface Mounted 8mm

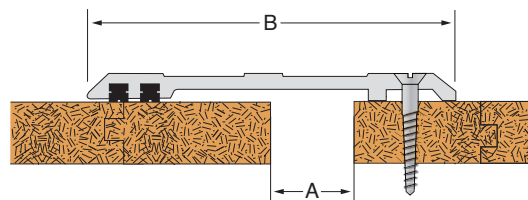

All dimensions in millimetres. All mechanical expansion joint fixings by others.

The G-25A Series

Considered a gymnasium expansion joint cover for timber floors. Although surface mounted, it also accommodates vertical movement in the flooring caused by team sport, exercise classes or similar. The series carries two slip-resistant strips, ensuring the best pedestrian safety with this system.

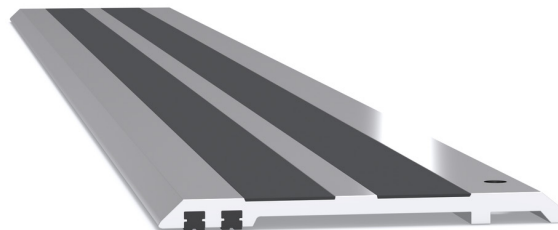

TECHNICAL CHARACTERISTICS				Illustrated: GA-25	
Aluminium Code	A	B	Movement	Total Available Movement	Overall Depth
G-25A	25	110	+/-25mm	50mm	Surface Mounted 8mm

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue