

DCA-60 to DCA-150 Aluminium Floor-to-Floor Expansion Joint Cover with Ribbed Deck



Features



Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use




Anti-Tamper Tie Bar Screws Available



Slip Resistant Sumo Grip (P4) Coating Available



Fire Rateable

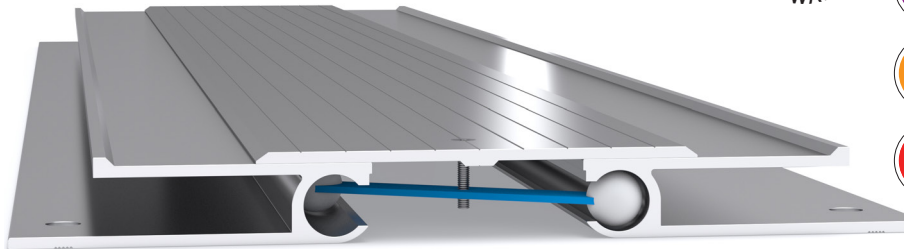

The DCA Ultimate Series robust floor-to-floor expansion joint covers are the shallowest recessed system available. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DCA-60

Aluminium Code Ribbed Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCA-60	60	205	125	40	35	105	+55/-50mm	105mm	26mm	4mm
DCA-110	110	255	175	40	35	105	+55/-65mm	120mm	27mm	5mm
DCA-150 ▲	150	295	215	40	35	105	+55/-65mm	120mm	27mm	5mm


▲ Denotes smooth aluminium cover plate suitable for slip resistant FlexTred (P5) or Sumo Grip (P4) coating.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Side members factory drilled with 10mm holes at ~475mm centres.

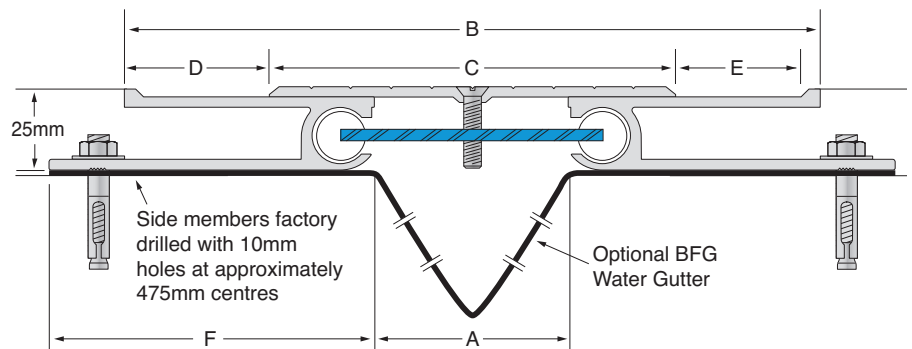

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue