DCSL-25 to DCSL-75

Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck

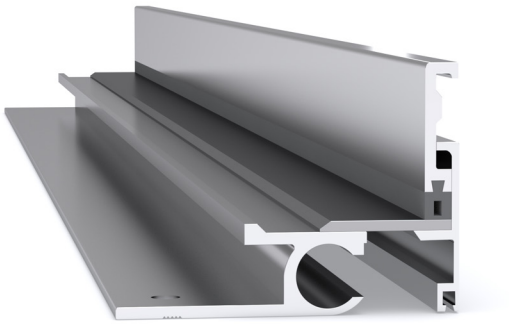

AUSTRALIAN MADE AND OWNED

GOOD DESIGN AWARD® WINNER

LATHAM 5 Year GENUINE WARRANTY

Features

- Multidirectional 6-way Movement
- Water Gutter Available
- Indoor Use
- Outdoor Use
- Fire Rateable
- Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available

The DCSL Ultimate Series robust floor-to-wall expansion joint covers carry a stainless steel cover plate. The series is the shallowest recessed system available. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS Illustrated: DCSL-25

Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCSL-25	25	56	37	18	12	68	+/-12mm	25mm	25mm	3mm
DCSL-50	50	82	62	18	12	68	+/-12mm	25mm	25mm	3mm
DCSL-75	75	106	87	18	12	68	+/-12mm	25mm	25mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

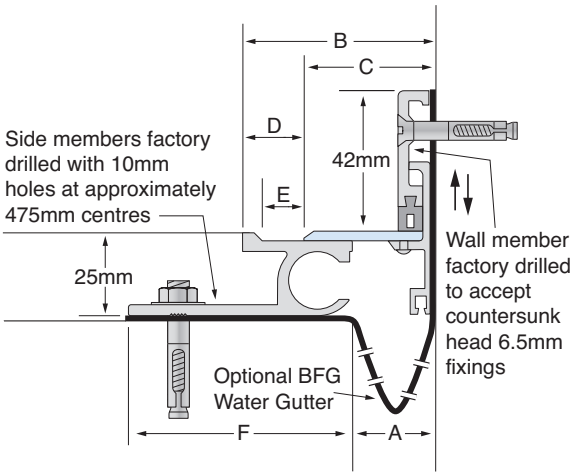

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs
- Architectural Specs
- Fire Rated Systems
- Product Catalogue
- Warranty Details
- Working Video

+61 2 9879 7888
joints@latham-australia.com

Designs and specifications subject to change without notice.