


DCSL-60 to DCSL-150

Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck



Features

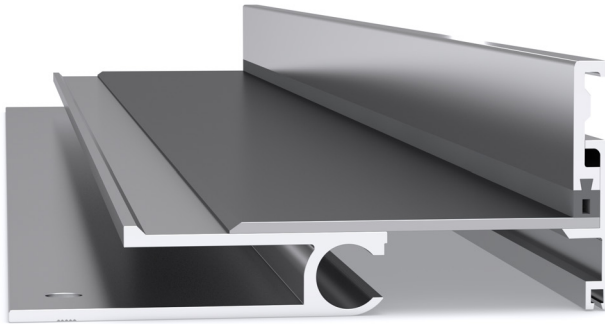

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available

The DCSL Ultimate Series robust floor-to-wall expansion joint covers carry a stainless steel cover plate. The series is the shallowest recessed system available. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DCSL-60


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCSL-60	60	139	99	40	35	105	+/-32mm	67mm	25mm	3mm
DCSL-110	110	185	145	40	35	105	+/-32mm	67mm	25mm	4mm
DCSL-150	150	225	185	40	35	105	+/-32mm	67mm	25mm	5mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres

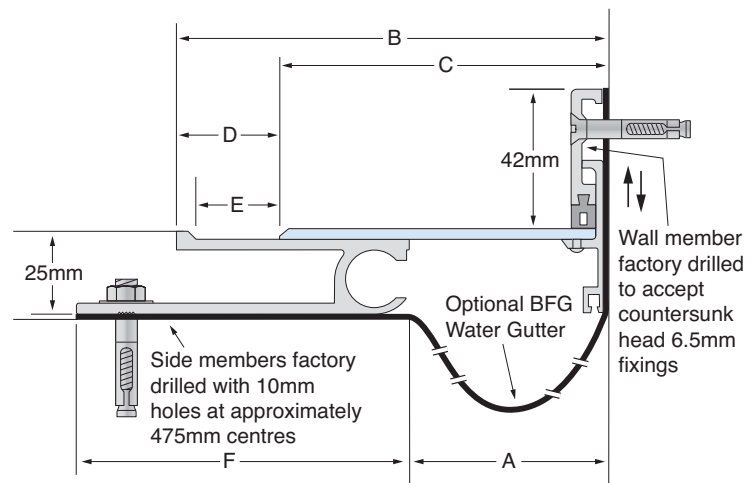

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue