


DCAL-25 to DCAL-75 Aluminium Floor-to-Wall Expansion Joint Cover with Ribbed Deck



Features

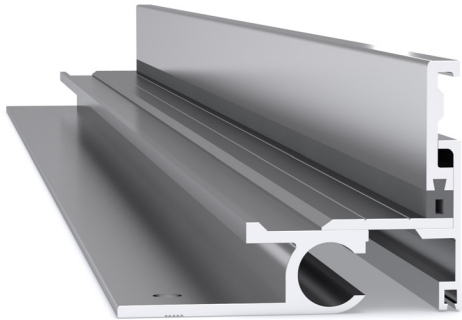

Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant Sumo Grip (P4) Coating Available

The DCAL Ultimate Series robust floor-to-wall expansion joint covers are the shallowest recessed system available. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DCAL-25


Aluminium Code Ribbed Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCAL-25	25	55	37	18	12	68	+/-12mm	25mm	67mm	3mm
DCAL-50	50	80	62	18	12	68	+/-12mm	25mm	67mm	3mm
DCAL-75	75	105	87	18	12	68	+/-12mm	25mm	67mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

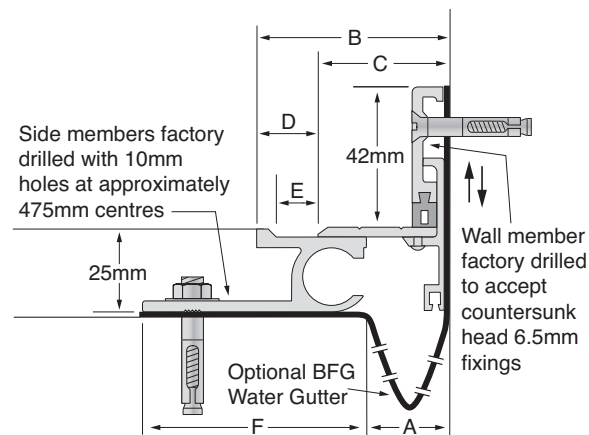

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue