

NSA-20 to NSA-105 Aluminium Floor-to-Floor Expansion Joint Cover with Ribbed Deck



Features



Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use




Anti-Tamper
Tie Bar Screws
Available



Slip Resistant
Sumo Grip (P4)
Coating Available



Fire Rateable

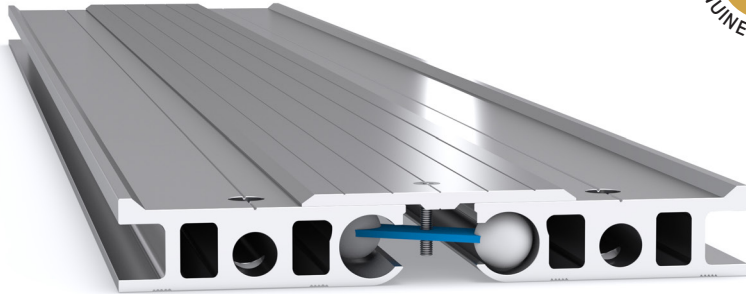

The NSA Ultimate Series robust floor-to-floor expansion joint covers are designed so that the side members are fixed directly to the underlying floor, for installing with a 25mm deep floor finish and no recess is required. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: NSA-20


Aluminium Code Ribbed Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NSA-20	20	157	75	41	35	77	+45/-10mm	55mm	25mm	3mm
NSA-30	30	182	100	41	35	77	+55/-20mm	75mm	25mm	3mm
NSA-55	55	207	125	41	35	77	+55/-45mm	100mm	26mm	4mm
NSA-80	80	234	150	41	35	77	+55/-65mm	120mm	27mm	5mm
NSA-105	105	257	175	41	35	77	+55/-70mm	125mm	27mm	5mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Side members factory drilled to accept 8mm countersunk head fixings at ~475mm centres.

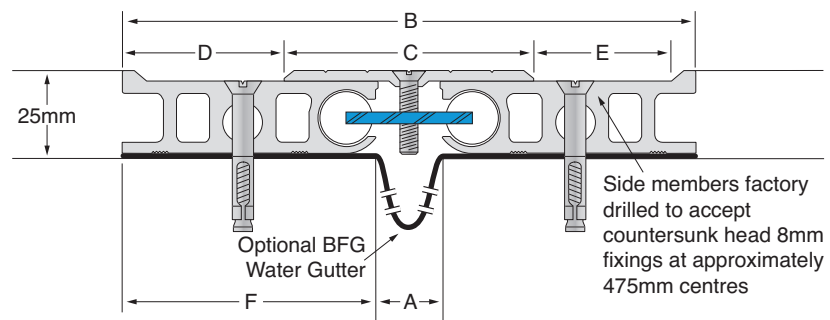

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs

- Architectural Specs
- Fire Rated Systems
- Product Catalogue

- Warranty Details
- Working Video