


NSSL-20 to NSSL-105

Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck



Features

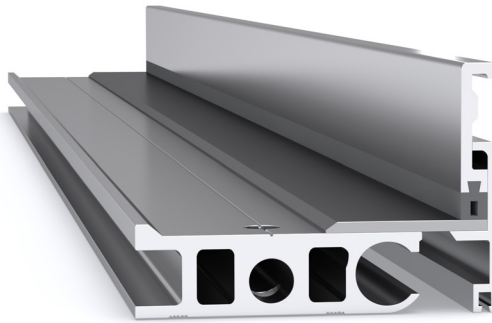

Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available

The NSSL Ultimate Series robust floor-to-wall expansion joint covers carry a stainless steel cover plate. The series is designed so that the side members are fixed directly to the underlying floor, for installing with a 25mm deep floor finish and no recess is required. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: NSSL-20


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
NSSL-20	20	96	55	41	35	77	+25/-8mm	33mm	67mm	3mm
NSSL-30	30	106	65	41	35	77	+30/-18mm	48mm	67mm	3mm
NSSL-55	55	131	90	41	35	77	+30/-40mm	70mm	67mm	3mm
NSSL-80	80	156	115	41	35	77	+30/-40mm	70mm	67mm	3mm
NSSL-105	105	181	140	41	35	77	+30/-40mm	70mm	68mm	4mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled to accept 8mm countersunk head fixings at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

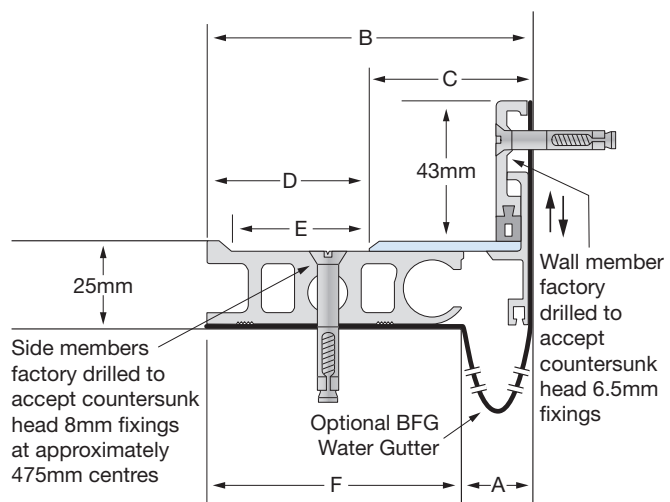

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue