


CS-25 to CS-50

Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck



Features

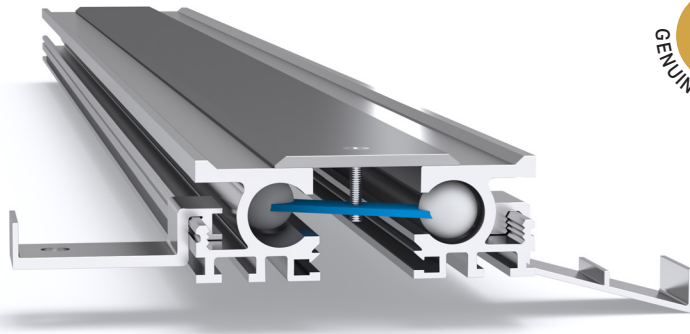

Multidirectional 6-way Movement



Water Gutter Available



Indoor Use



Outdoor Use



Anti-Tamper Tie Bar Screws Available



Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available



Fire Rateable



Factory Curvable

The CS Ultimate Series robust floor-to-floor expansion joint covers carry a stainless steel cover plate. The series is designed to be installed in a recess with CA-16 Anchors or cast into topping or a slab using CA-6 anchors. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: CS-25


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
CS-25	25	86	50	18	12	82	+20/-15mm	35mm	33mm	3mm
CS-50	50	111	75	18	12	82	+20/-25mm	45mm	33mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Supplied with clip-on CA-16 Block-Out Anchors with factory drilled 10mm holes installed at maximum ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied for cast-in installations.

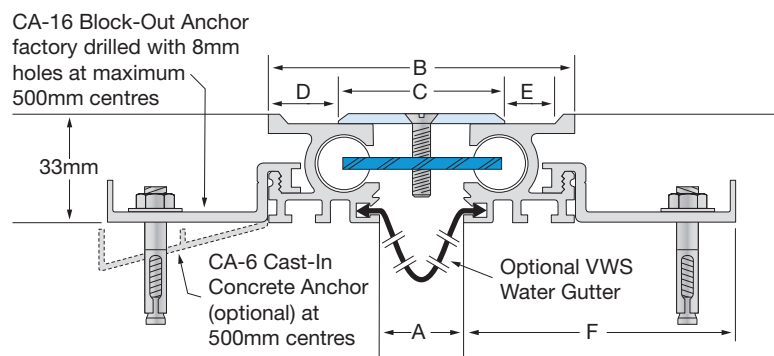

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue