


SAS-25 (FASM 38) to SAS-75 (FASM 38) Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck



Features

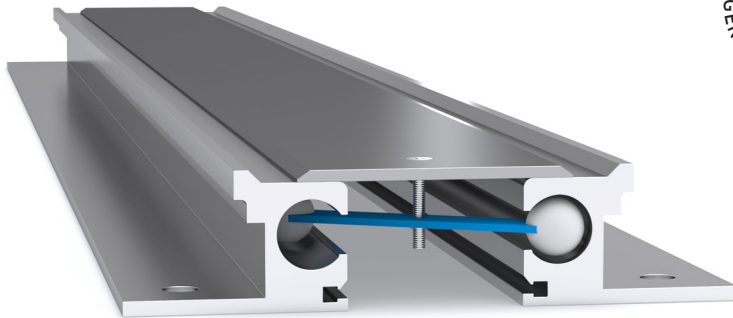

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Anti-Tamper
Tie Bar Screws
Available



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available



Fire Rateable

The SAS (FASM 38) Ultimate Series robust floor-to-floor expansion joint covers carry a stainless steel cover plate. The series is designed to be fixed with floor finishes to 38mm deep, intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: SAS-50 (FASM 38)


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SAS-25 (FASM 38)	25	86	50	18	13	60	+20/-15mm	35mm	38mm	3mm
SAS-50 (FASM 38)	50	111	75	18	13	60	+20/-25mm	45mm	38mm	3mm
SAS-75 (FASM 38)	75	136	100	18	13	60	+20/-25mm	45mm	38mm	3mm

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ 304 Grade 2B finish stainless steel cover plates.
- ➔ Supplied in 3050mm lengths.
- ➔ Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- ➔ Side members factory drilled with 10mm holes at ~475mm centres.

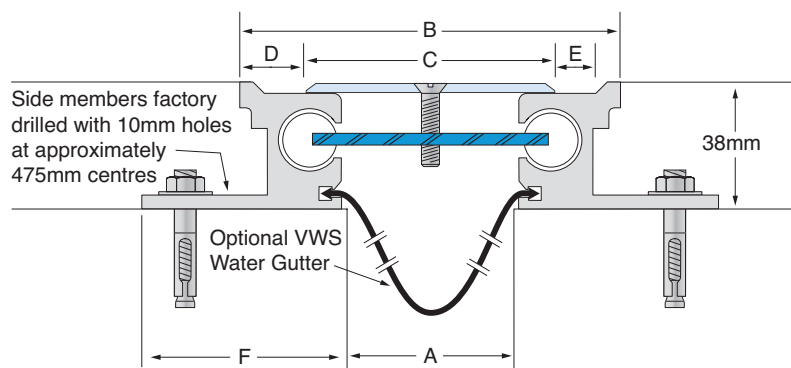

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue