SLS-25 (FASM 50) to SLS-50 (FASM 50)
Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck

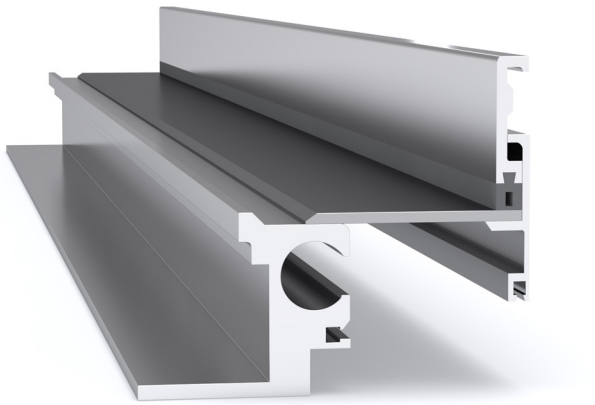

AUSTRALIAN MADE AND OWNED

GOOD DESIGN AWARD® WINNER

LATHAM 5 Year GENUINE WARRANTY

Features

- Multidirectional 6-way Movement
- Water Gutter Available
- Indoor Use
- Outdoor Use
- Fire Rateable
- Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available

The SLS (FASM 50) Ultimate Series robust floor-to-wall expansion joint covers carry a stainless steel cover plate. The series is designed to be fixed with floor finishes to 50mm deep, intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS Illustrated: SLS-50 (FASM 50)

Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLS-25 (FASM 50)	25	56	38	18	13	60	+/-12mm	25mm	92mm	3mm
SLS-50 (FASM 50)	50	81	63	18	13	60	+/-12mm	25mm	92mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.

Fixings

- Side member factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

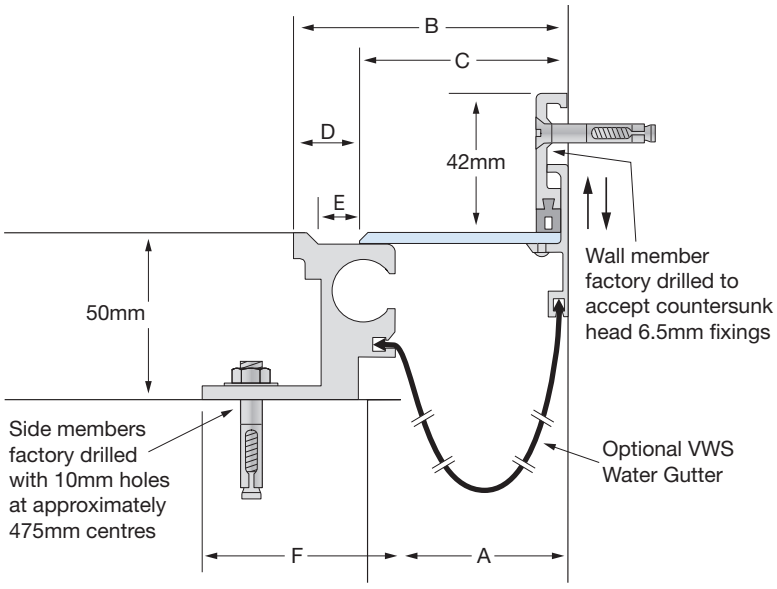

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs
- Architectural Specs
- Fire Rated Systems
- Product Catalogue
- Warranty Details
- Working Video

+61 2 9879 7888
joints@latham-australia.com

Designs and specifications subject to change without notice.