


SLS-30 (FASM 64) to SLS-155 (FASM 64) Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck



Features

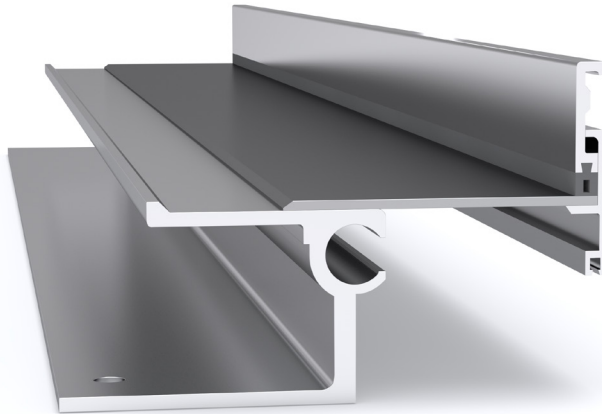

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available

The SLS (FASM 64) Ultimate Series robust floor-to-wall expansion joint covers carry a stainless steel cover plate. The series is designed to be fixed with floor finishes to 64mm deep, intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: SLS-80 (FASM 64)


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLS-30 (FASM 64)	30	105	65	40	35	101	+32/-25mm	57mm	106mm	3mm
SLS-55 (FASM 64)	55	130	90	40	35	101	+/-32mm	65mm	106mm	3mm
SLS-80 (FASM 64)	80	155	115	40	35	101	+/-32mm	65mm	106mm	3mm
SLS-105 (FASM 64)	105	180	140	40	35	101	+/-32mm	65mm	106mm	3mm
SLS-130 (FASM 64)	130	205	165	40	35	101	+/-32mm	65mm	107mm	4mm
SLS-155 (FASM 64)	155	230	190	40	35	101	+/-32mm	65mm	108mm	5mm

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ 304 Grade, 2B finish stainless steel cover plates.
- ➔ Supplied in 3050mm lengths.

Fixings

- ➔ Side member factory drilled with 10mm holes at ~475mm centres.
- ➔ Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

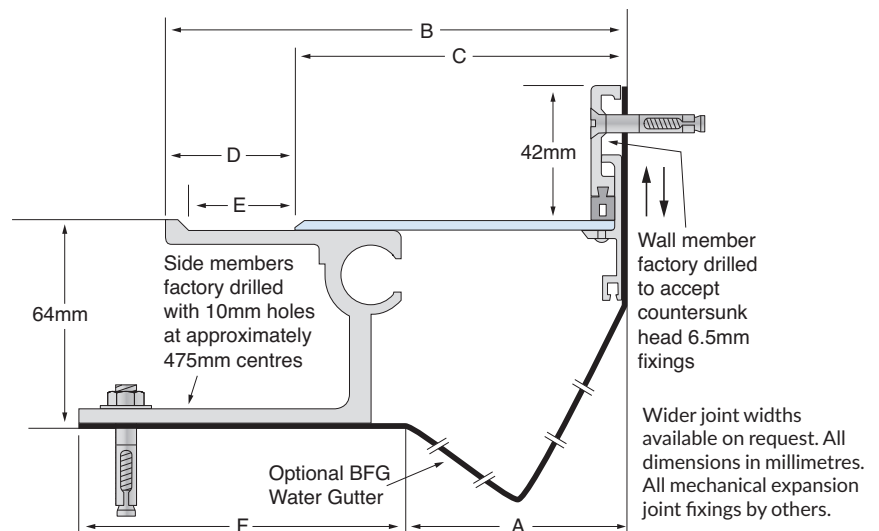

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Architectural Specs
- ➔ Warranty Details
- ➔ Product Information
- ➔ Fire Rated Systems
- ➔ Working Video
- ➔ Joint Cover Specs
- ➔ Product Catalogue