

SAS-44 (SSSM ▲) to SAS-150 (SSSM ▲) Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck



Features



Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Anti-Tamper
Tie Bar Screws
Available



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available



Factory
Curvable



Fire Rateable

The SAS (SSSM) Ultimate Series robust, variable height floor-to-floor expansion joint covers are available in a range of sizes to accommodate deep flooring finishes. Depths available are 79mm, 89mm, 104mm, 114mm, 139mm and 164mm. The SAS (SSSM) Series carry a stainless steel cover plate and are intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.


TECHNICAL CHARACTERISTICS

Illustrated: SAS-75 (SSSM 79)

Stainless Steel Code Smooth Deck	A	B	C	D	E	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SAS-44 (SSSM ▲)	44	164	100	32	26	+50/-40mm	90mm	Specify	3mm
SAS-75 (SSSM ▲)	70	189	125	32	26	+50/-50mm	100mm	Specify	3mm
SAS-100 (SSSM ▲)	95	214	150	32	26	+50/-50mm	100mm	Specify	3mm
SAS-150 (SSSM ▲)	145	264	200	32	26	+50/-50mm	100mm	Specify	4mm

Code ▲ Depth Detail	G	Code ▲ Depth Detail	G
SSSM 79	85	SSSM 114	95
SSSM 89	95	SSSM 139	95
SSSM 104	110	SSSM 164	110

▲ Specify required depth i.e. SAS-75 (SSSM 79) as drawn. Available depths: 79mm, 89mm, 104mm, 114mm, 139mm & 164mm. "F" distance subject to required depth. See code depth detail.

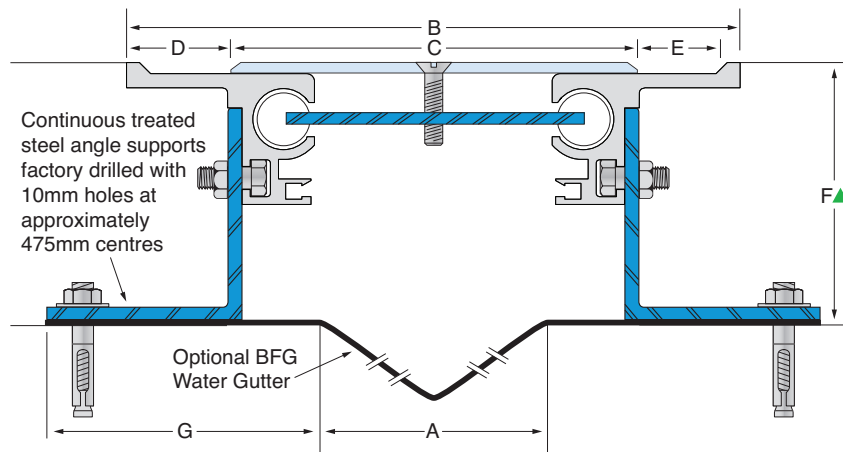

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Materials

- ➔ Aluminium 6063-T5 mill finish alloy.
- ➔ 304 Grade 2B finish stainless steel cover plates.
- ➔ Treated steel angle supports.
- ➔ Supplied in 3050mm lengths.
- ➔ Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- ➔ Side members factory drilled with 10mm holes at ~475mm centres.

Further technical specifications and information – visit www.latham-australia.com

- ➔ PDF & DWG Details
- ➔ Product Information
- ➔ Joint Cover Specs

- ➔ Architectural Specs
- ➔ Fire Rated Systems
- ➔ Product Catalogue

- ➔ Warranty Details
- ➔ Working Video