


CA-25 to CA-50 Aluminium Floor-to-Floor Expansion Joint Cover with Ribbed Deck



Features

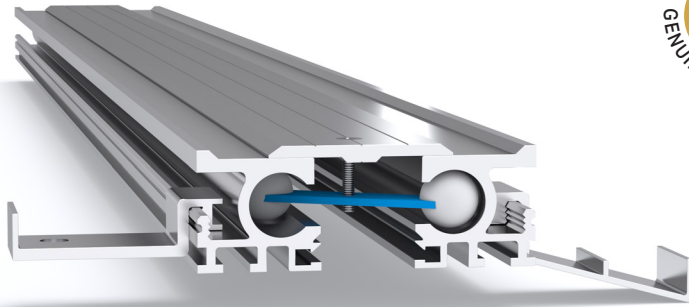

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Anti-Tamper
Tie Bar Screws
Available



Slip Resistant
Sumo Grip (P4)
Coating Available



Fire Rateable

The CA Ultimate Series robust floor-to-floor expansion joint covers are designed to be installed in a recess with CA-16 Anchors or cast into topping or slab using CA-6 anchors. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: CA-25

Aluminium Code Ribbed Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
CA-25	25	86	50	18	12	82	+20/-15mm	35mm	33mm	3mm
CA-50	50	111	75	18	12	82	+20/-25mm	45mm	33mm	3mm


Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Supplied with clip-on CA-16 Block-Out Anchors with factory drilled 10mm holes installed at maximum ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied for cast-in installations.

CA-16 Block-Out Anchor
factory drilled with 8mm
holes at maximum
500mm centres

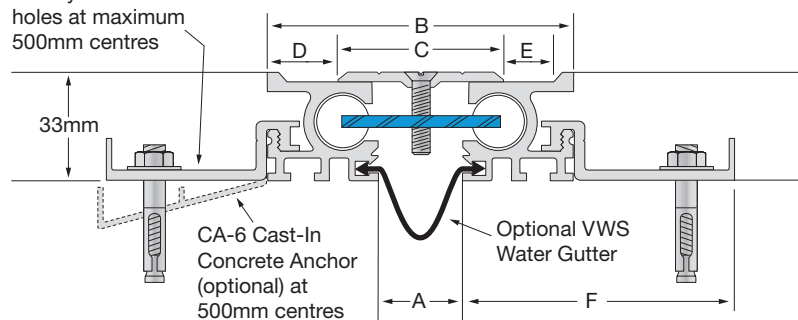

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue