SLS-44 (SSSM ▲) to SLS-150 (SSSM ▲)
Floor-to-Wall Expansion Joint Cover with Stainless Steel Deck

AUSTRALIAN MADE AND OWNED

GOOD DESIGN AWARD® WINNER

LATHAM 5 Year GENUINE WARRANTY

Features

- Multidirectional 6-way Movement
- Water Gutter Available
- Indoor Use
- Outdoor Use
- Fire Rateable
- Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available
- Factory Curvable

The SLS (SSSM) Ultimate Series robust, variable height floor-to-wall expansion joint covers are available in a range of sizes to accommodate deep flooringfinishes. Depths available are 79mm, 89mm, 104mm, 114mm, 139mm and 164mm. The SLS (SSSM) Series carry a stainless steel cover plate and are intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS Illustrated: SLS-75 (SSSM 79)

Stainless Steel Code Smooth Deck	A	B	C	D	E	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLS-44 (SSSM ▲)	44	110	78	32	26	+/-25mm	50mm	Specify	3mm
SLS-75 (SSSM ▲)	70	132	100	32	26	+/-25mm	50mm	Specify	3mm
SLS-100 (SSSM ▲)	95	157	125	32	26	+/-25mm	50mm	Specify	3mm
SLS-150 (SSSM ▲)	145	217	175	32	26	+/-25mm	50mm	Specify	4mm

Code ▲ Depth Detail	G
SSSM 79	85
SSSM 89	95
SSSM 104	110

Code ▲ Depth Detail	G
SSSM 114	95
SSSM 139	95
SSSM 164	110

▲ Specify required depth i.e. SLS-75 (SSSM 79) as drawn. Available depths: 79mm, 89mm, 104mm, 114mm, 139mm & 164mm. "F" distance subject to required depth. See code depth detail.

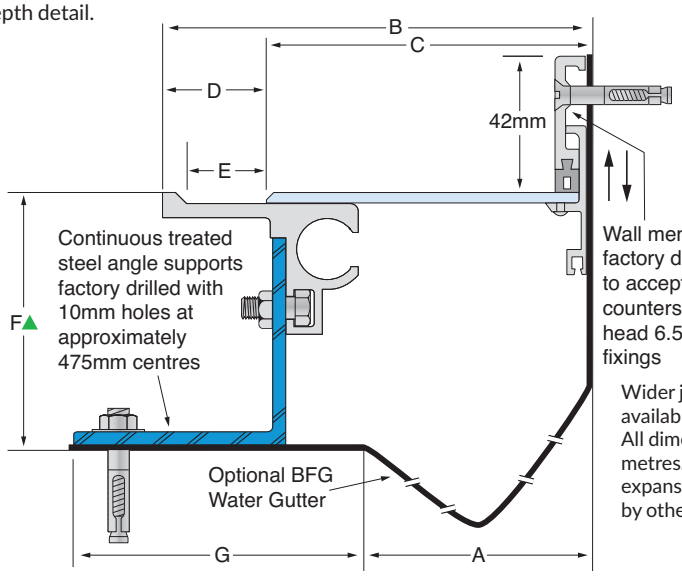

Wider joint widths available on request. All dimensions in millimetres. All mechanical expansion joint fixings by others.

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Treated steel angle supports.
- Supplied in 3050mm lengths.

Fixings

- Continuous treated steel support angles factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept countersunk head 6.5mm fixings at ~475mm centres.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs
- Architectural Specs
- Fire Rated Systems
- Product Catalogue
- Warranty Details
- Working Video

+61 2 9879 7888
joints@latham-australia.com

Designs and specifications subject to change without notice.

LATHAM
www.latham-australia.com