


SLA-25 (SSSM ▲) to SLA-50 (SSSM ▲) Aluminium Floor-to-Wall Expansion Joint Cover with Ribbed Deck



Features

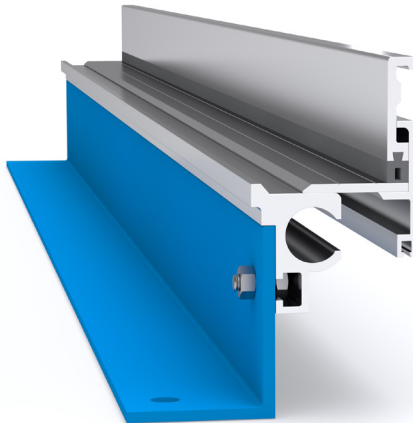

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Sumo Grip (P4)
Coating Available

The SLA (SSSM) Ultimate Series robust, variable height floor-to-wall expansion joint covers are available in a range of sizes to accommodate deep flooring finishes. Depths available are 79mm, 89mm, 104mm, 114mm, 139mm and 164mm. The SLA (SSSM) Series are intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: SLA-25 (SSSM 79)

Aluminium Code Ribbed Deck	A	B	C	D	E	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLA-25 (SSSM ▲)	25	56	38	18	13	+/-12mm	24mm	Specify	3mm
SLA-50 (SSSM ▲)	50	81	63	18	13	+/-12mm	24mm	Specify	3mm

Code ▲ Depth Detail	G	Code ▲ Depth Detail	G
SSSM 79	85	SSSM 114	95
SSSM 89	95	SSSM 139	95
SSSM 104	110	SSSM 164	110


▲ Specify required depth i.e. SLA-25 (SSSM 79) as drawn. Available depths: 79mm, 89mm, 104mm, 114mm, 139mm & 164mm. "F" distance subject to required depth. See code depth detail.

Materials

- Aluminium 6063-T5 mill finish alloy.
- Treated steel angle supports.
- Supplied in 3050mm lengths.

Fixings

- Continuous treated steel support angles factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept countersunk head 6.5mm fixings at ~475mm centres.

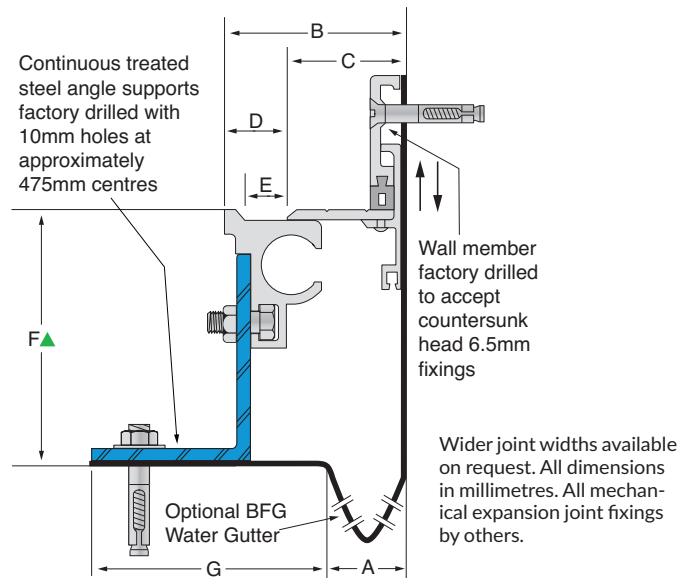

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue