


CAB-25 to CAB-50 Solid Brass Floor-to-Floor Expansion Joint Cover with Smooth Deck



Features

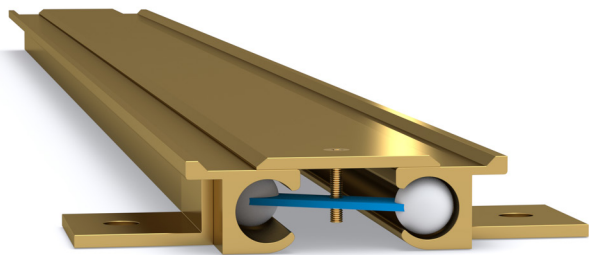

The CAB Solid Brass Ultimate Series robust floor-to-floor expansion joint covers offer the elegance of a solid brass expansion joint cover. The systems are 25mm deep and are intended predominantly for pedestrian style applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: CAB-25


Brass Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
CAB-25	25	86	50	18	13	60	+20/-15mm	35mm	25mm	3mm
CAB-50	50	111	75	18	13	60	+/-25mm	50mm	25mm	3mm

Materials

- Brass 380 mill finish alloy.
- Supplied in 4000mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- BM-16 Block-Out Anchors are supplied factory drilled with 10mm holes. They are supplied welded to the side members at ~475mm centres.
- On request: BS-6 Cast-In Anchors can be supplied for cast-in applications and will be welded at ~475mm centres.

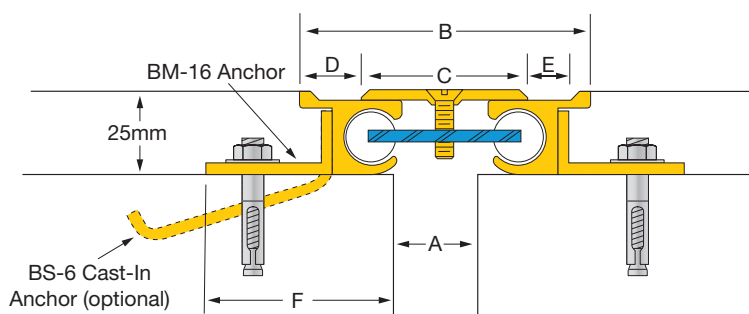

All anchors are supplied welded to the side members at approximately 475mm centres. BM-16 anchors are supplied factory drilled with 8mm holes at approximately 475mm centres.

Wider joint widths available on request. All dimensions in millimetres.
All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue