


LAB-51 to LAB-150 Solid Brass Floor-to-Wall Expansion Joint Cover with Smooth Deck



Features

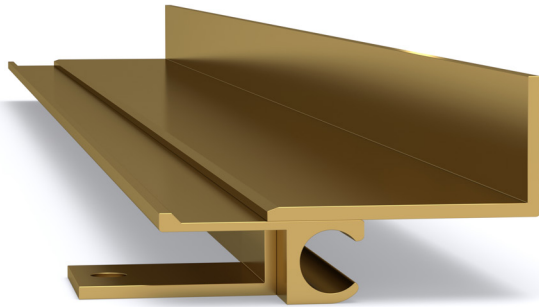

Multidirectional
4-way Movement



Indoor Use



Fire Rateable



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available



Factory
Curvable

The LAB Solid Brass Ultimate Series robust floor-to-wall expansion joint covers offer the elegance of a solid brass expansion joint cover. The systems are 25mm deep and are intended predominantly for pedestrian style applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: LAB-51


Brass Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
LAB-51	50	105	75	30	25	75	+/-25mm	50mm	60mm	3mm
LAB-75	75	130	100	30	25	75	+/-25mm	50mm	60mm	3mm
LAB-100	100	155	125	30	25	75	+/-25mm	50mm	60mm	3mm
LAB-150	150	205	175	30	25	75	+/-25mm	50mm	62mm	5mm

Materials

- Brass 380 mill finish alloy.
- Side members supplied in 4000mm lengths. Angle wall section supplied in 1800mm lengths.

Fixings

- BM-16 Block-Out Anchors are supplied factory drilled with 10mm holes. They are supplied welded to the side members at ~475mm centres.
- On request: BS-6 Cast-In Anchors can be supplied for cast-in applications and will be welded at ~475mm centres.
- Wall member factory drilled to accept countersunk head 6.5mm fixings at ~475mm centres.

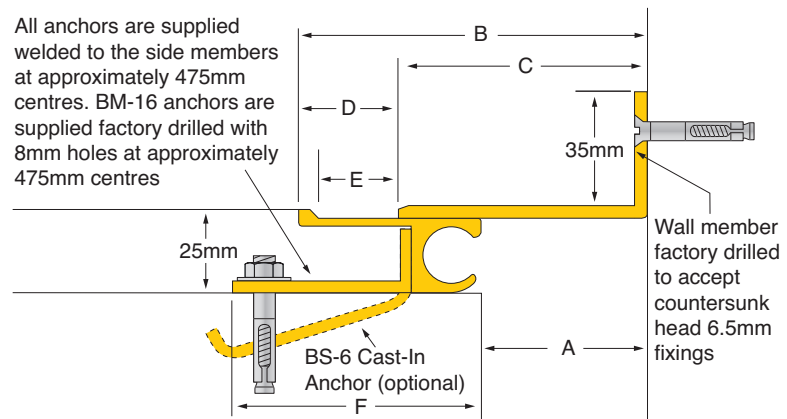

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue