SLB-25 (SSSM ▲) to SLB-50 (SSSM ▲)

Solid Brass Floor-to-Wall Expansion Joint Cover with Smooth Deck

AUSTRALIAN MADE AND OWNED

GOOD DESIGN AWARD® WINNER

LATHAM 5 Year GENUINE WARRANTY

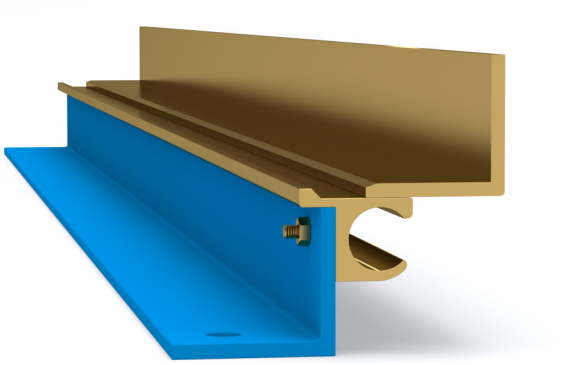

Features

- Multidirectional 4-way Movement
- Water Gutter Available
- Indoor Use
- Outdoor Use
- Fire Rateable
- Slip Resistant Flex-Tred (P5) or Sumo Grip (P4) Coating Available
- Factory Curvable

The SLB (SSSM) Solid Brass Ultimate Series robust, variable height floor-to-wall expansion joint covers offer the elegance of a brass expansion joint cover. The SLB (SSSM) series is available in a range of sizes to accommodate deep flooring finishes. Depths available are 45mm, 55mm, 70mm, 80mm, 95mm, 105mm, 130mm and 155mm. The SLB (SSSM) series is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, pavers and stone. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: SLB-25 (SSSM 45)

Brass Code Smooth Deck	A	B	C	D	E	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
SLB-25 (SSSM▲)	25	56	38	18	12	+/-12mm	24mm	Specify	3mm
SLB-50 (SSSM▲)	50	82	64	18	12	+/-12mm	24mm	Specify	3mm

Code ▲ Depth Detail	G	Code ▲ Depth Detail	G
SSSM 45	65	SSSM 95	115
SSSM 55	75	SSSM 105	100
SSSM 70	90	SSSM 130	100
SSSM 80	100	SSSM 155	125

▲ Specify required depth i.e. SLB-25 (SSSM 45) as drawn. Available depths: 55mm, 70mm, 80mm, 95mm, 105mm, 130mm & 155mm. "F" distance subject to required depth. See code depth detail.

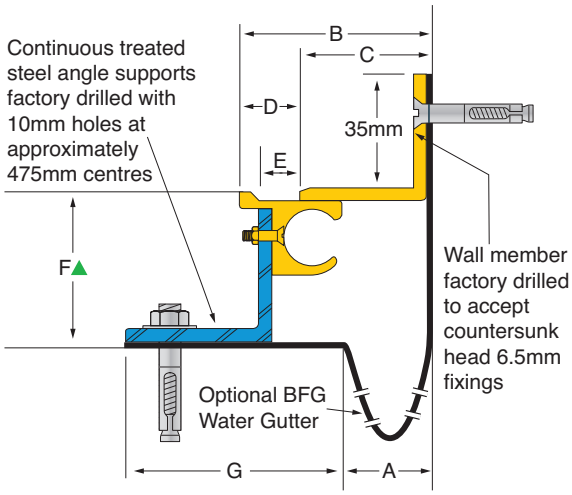

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Materials

- Brass 380 mill finish alloy.
- Treated steel angle supports.
- Side member supplied in 4000mm lengths,
- Angle wall sections supplied in 1800mm lengths.

Fixings

- Continuous treated steel support angles factory drilled with 10mm holes at ~475mm centres.
- Wall member factory drilled to accept countersunk head 6.5mm fixings at ~475mm centres.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs
- Architectural Specs
- Fire Rated Systems
- Product Catalogue
- Warranty Details
- Working Video

+61 2 9879 7888
joints@latham-australia.com

Designs and specifications subject to change without notice.