


LA-35 to LA-150 Aluminium Floor-to-Wall Expansion Joint Cover with Ribbed Deck



Features

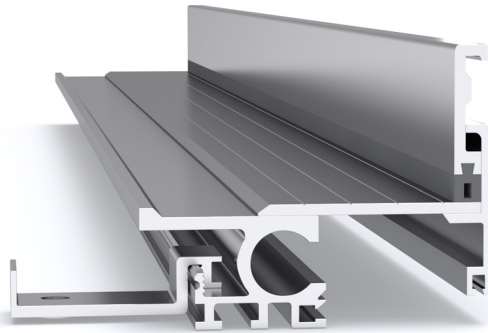

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Fire Rateable



Slip Resistant
Sumo Grip (P4)
Coating Available

The LA Ultimate Series robust floor-to-wall expansion joint covers are designed to be installed in a recess with CA-16 Anchors or cast into topping or slab using CA-6 anchors. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: LA-45


Aluminium Code Ribbed Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
LA-45	46	91	66	25	20	82	+/-20mm	40mm	75mm	3mm
LA-75	75	116	91	25	20	82	+/-20mm	40mm	75mm	4mm
LA-100	100	141	116	25	20	82	+/-20mm	40mm	75mm	4mm
LA-150	150	191	166	25	20	82	+/-20mm	40mm	75mm	5mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- Supplied in 3050mm lengths.

Fixings

- Supplied with clip-on CA-16 Block-Out Anchors with factory drilled 10mm holes installed at maximum ~500mm centres.
- On request: CA-6 Cast-In Anchors can be supplied for cast-in installations.
- Wall member factory drilled to accept 6.5mm countersunk head fixings at ~475mm centres.

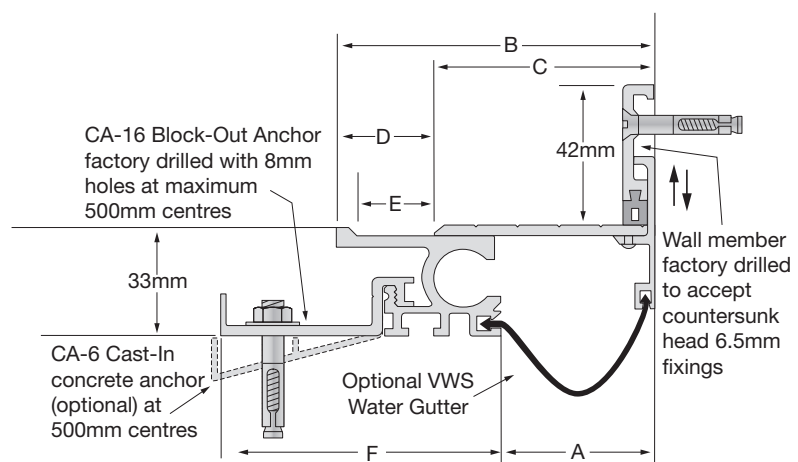

Wider joint widths available on request.

All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Architectural Specs
- Warranty Details
- Product Information
- Fire Rated Systems
- Working Video
- Joint Cover Specs
- Product Catalogue