


DCS-25 to DCS-75

Floor-to-Floor Expansion Joint Cover with Stainless Steel Deck



Features

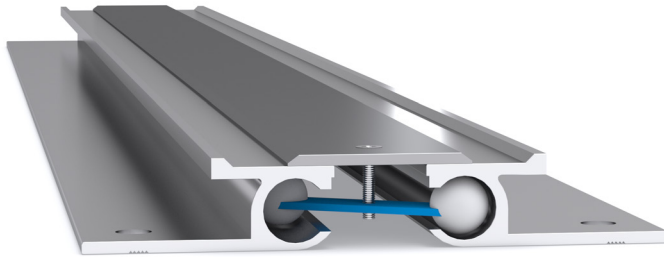

Multidirectional
6-way Movement



Water Gutter
Available



Indoor Use



Outdoor Use



Anti-Tamper
Tie Bar Screws
Available



Slip Resistant
Flex-Tred (P5) or
Sumo Grip (P4)
Coating Available



Fire Rateable

The DCS Ultimate Series robust floor-to-floor expansion joint covers carry a stainless steel cover plate. The series is the shallowest recessed system available. It is intended predominantly for pedestrian applications. These joints can be used in conjunction with many floor finishes such as concrete toppings, terrazzo, tile, timber, carpet, vinyl, epoxy finishes etc. They would commonly be used in locations such as shopping centres, hotels, office foyers, schools, airports and other pedestrian traffic situations.

TECHNICAL CHARACTERISTICS

Illustrated: DCS-25


Stainless Steel Code Smooth Deck	A	B	C	D	E	F	Movement	Total Available Movement	Overall Depth	Cover Plate Thickness
DCS-25	25	86	50	18	12	68	+20/-15mm	35mm	25mm	3mm
DCS-50	50	111	75	18	12	68	+20/-25mm	45mm	25mm	3mm
DCS-75	75	136	100	18	12	68	+20/-25mm	45mm	25mm	3mm

Materials

- Aluminium 6063-T5 mill finish alloy.
- 304 Grade 2B finish stainless steel cover plates.
- Supplied in 3050mm lengths.
- Spring steel treated centring bar with nylon spherical balls at ~475mm centres.

Fixings

- Side members factory drilled with 10mm holes at ~475mm centres.

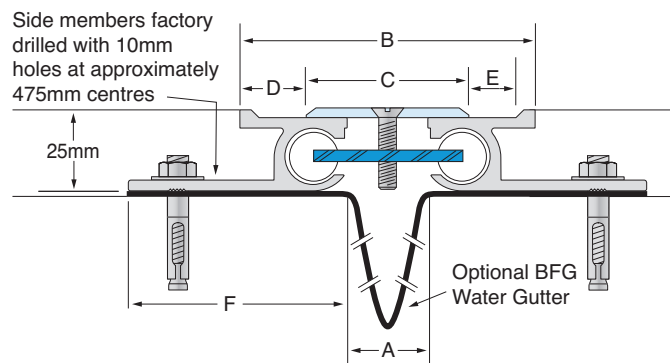

Wider joint widths available on request.
All dimensions in millimetres. All mechanical expansion joint fixings by others.

Further technical specifications and information – visit www.latham-australia.com

- PDF & DWG Details
- Product Information
- Joint Cover Specs

- Architectural Specs
- Fire Rated Systems
- Product Catalogue

- Warranty Details
- Working Video